

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

端子：黄铜/磷青铜

Contact :Brass/Phosphor bronze

2.特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

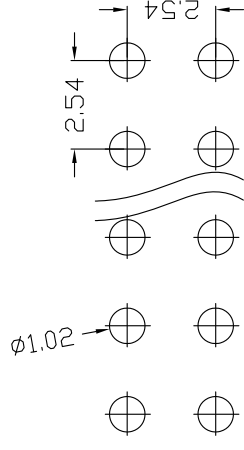
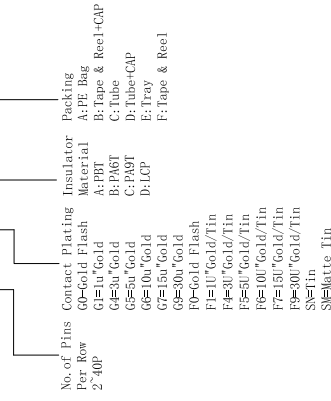
耐电压: AC 500V.

Withstanding voltage: AC 500V.
温度范围 -40°C ~ +105°C

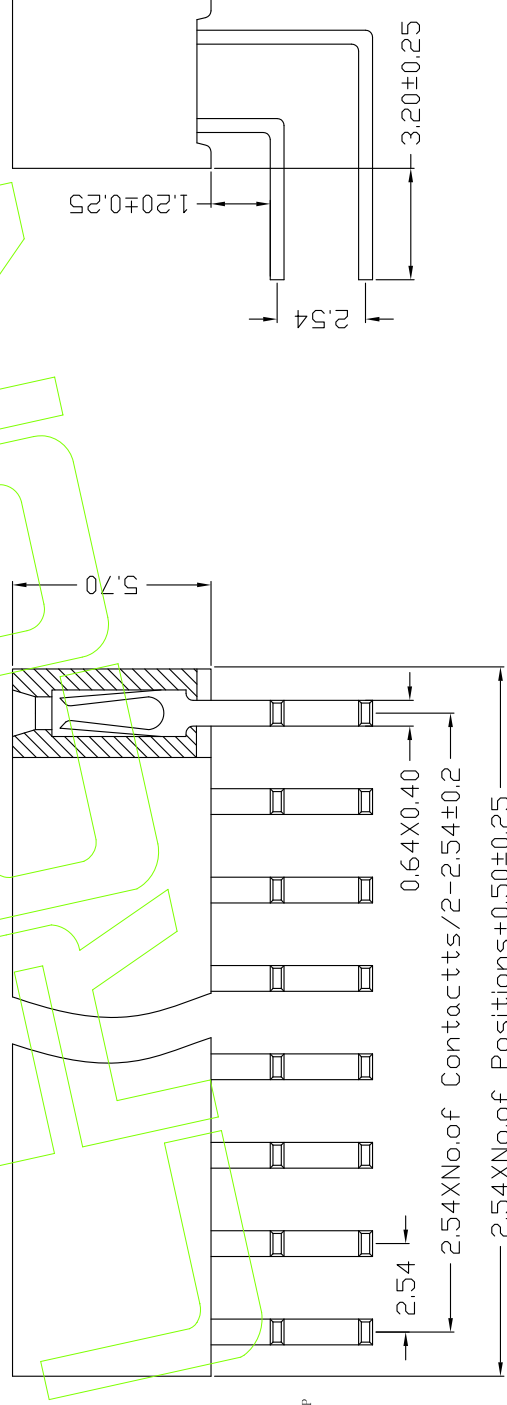
温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

temperature range: -40°C to +100°C

Ordering Information

3F57R-21 XX XX Y X 1 Δ_{A1} 

Recommended P. C. B layout

[illegible]