



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-O, 颜色: 黑色.

Housing:PA6T/PBT+30%G.F UL94V-O,Color:Black

端子: 黄铜/磷青铜

Contact :Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current:3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance:1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.


温度范围: -40°C to+105°C

Temperature Range: -40°C to+105°C


Ordering Information

3F57R- 11 XX XX X Y X 1 Δ

No. of Pins Per Row 2~40P	Contact Plating	Insulator	Packing
G=10" Gold	A: PBT	A: PBT	A: PPE Bag
G=30" Gold	B: PBT	B: PBT	B: Tape & Reel+CAP
G=50" Gold	C: PBT	C: PBT	C: Tube
G=100" Gold	D: LCP	D: LCP	D: Tube+CAP
G=150" Gold			E: Tray
G=300" Gold			F: Tape & Reel
P=Gold Flash			
F=10" Gold/Tin			
F=30" Gold/Tin			
F=50" Gold/Tin			
F=100" Gold/Tin			
F=150" Gold/Tin			
F=300" Gold/Tin			
Sn=Tin			
Sh=Matte Tin			

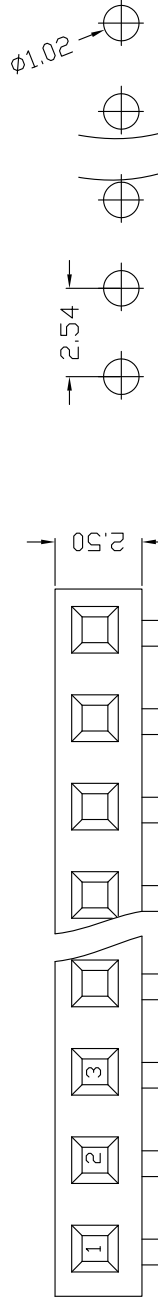

Recommended P.C.B layout

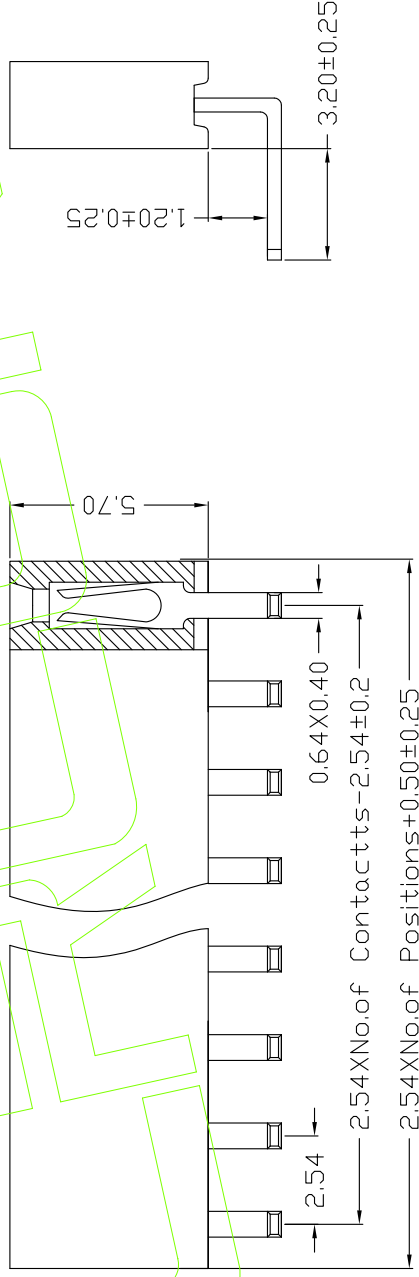

		LIRCON		连润电子有限公司		Lrcon Electronics Co.,Ltd	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	DESIGN	3F57R-11XXXXXX1	PART NO.
A0	12/05/18	NEW			CHECK	2.54单排母 塑高5.7 Y型 90度	TITLE:
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	Customer No.	Customer No.