

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

3F50W- 21 XX XX X U X 3 Δ

No. of Pins Pin Row 2-40P	Contact Plating G=Gold Flash G1=10" Gold G2=30" Gold G3=50" Gold G4=100" Gold G5=150" Gold G6=300" Gold F=10" Gold/Tin F1=30" Gold/Tin F2=50" Gold/Tin F3=100" Gold/Tin F4=150" Gold/Tin F5=300" Gold/Tin Sn=Tin Sn=Matte Tin	Insulator Material D: PA6T C: PA9T D: LCP	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
---------------------------------	--	---	---

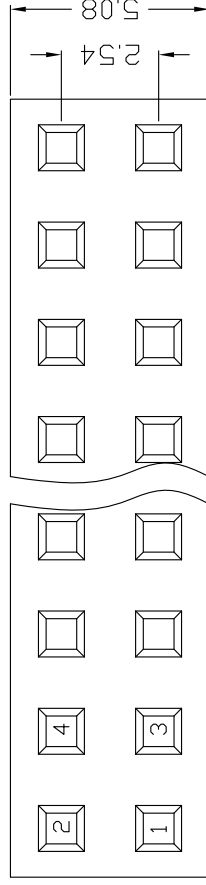

Recommended P.C.B layout

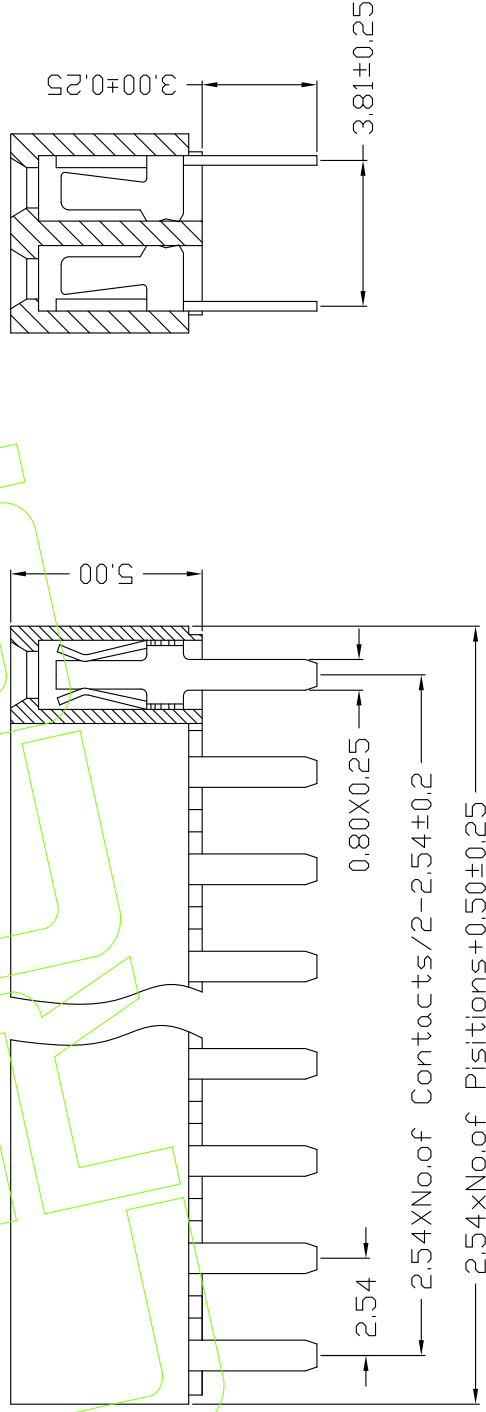

LIRCON		连润电子有限公司		Lrcon Electronics Co., Ltd	
A1		20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	Δ
A0		12/05/18	NEW	—	—
REV	DATE	MODIFICATION DESCRIPTION			
1	2	3	4	5	6
DRAW		LI ANR	20/06/09	SCALE	UNIT
DESIGN		张涛		A4	DESIGN
CHECK		罗荣军		1/1	CHECK
APPROVE		方里军		PROJ.	APPROVE
PART NO.		3F50W-21XXXXUX3		TITLE:	
Customer No.		2.54双排母 塑高5.0 蜈蚣脚 脚距3.81		Fit	
MM		3.81		SHEET	
3		4		5	
6		7		8	
9		10		11	