

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子: 黄铜/磷青铜

銅 : 黄銅/ 磷青銅
Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 3 AMP

额定电流: 3 AMP
Rating Current: 3 AMP.

接觸阻抗: 20 mΩ MAX

按触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

绝缘阻抗: 1000 M Ω min.
Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

耐压: AC 300V.
Withstanding Voltage: AC 500V.

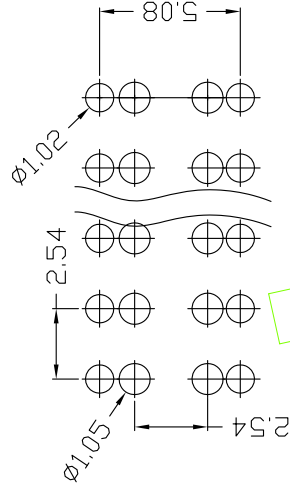
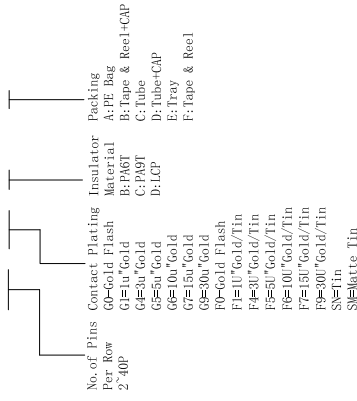
Withstanding voltage: AC 300V.
温度范围: -40°C to $+105^{\circ}\text{C}$

温度范围: -40°C 到 $+105^{\circ}\text{C}$
Temperature Range: -40°C


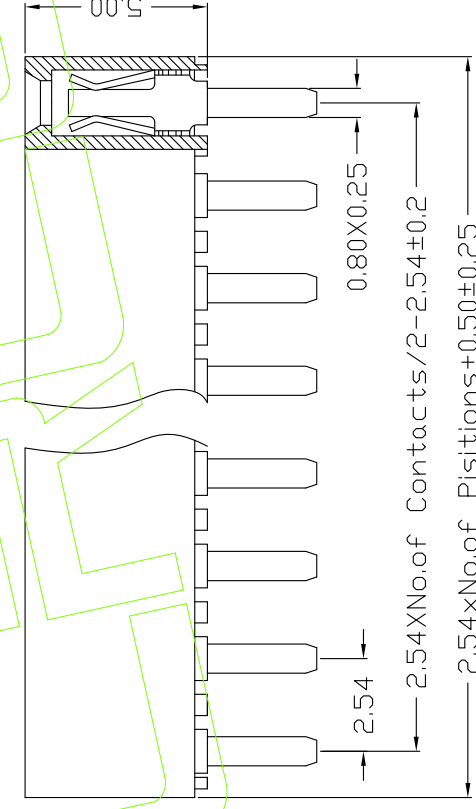
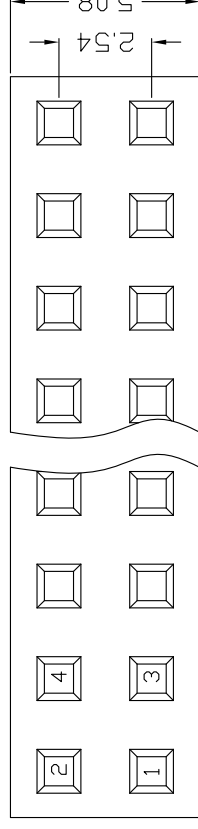
Temperature Range: -40°C to +105°C

Ordering Information

3F50W-21 XX XX X U X 2 $\triangle_{A1}$



Recommended P.C.B layout

[illegible]