

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 3 mΩ MAX.

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

3F50W- 11 XX XX X U X X Δ


No. of Pins
Per Row
1 40P

Contact Plating
Material
G=10" Gold
G=30" Gold
G=50" Gold
G=100" Gold
G=150" Gold
G=300" Gold
F=10" Gold/Tin
F=30" Gold/Tin
F=50" Gold/Tin
F=100" Gold/Tin
F=150" Gold/Tin
F=300" Gold/Tin
Sn= Tin
S= Matte Tin


Insulator
Material
D: PA6T
C: PA9T
D: LCP

Packing
A: Type Bag
B: Tape & Reel-CAP
C: Tube
D: Tube-CAP
E: Tray
F: Tape & Reel

A: TYPE A
B: TYPE B


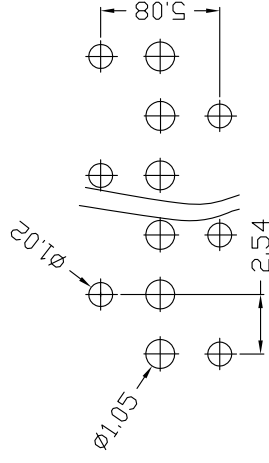


TYPE A

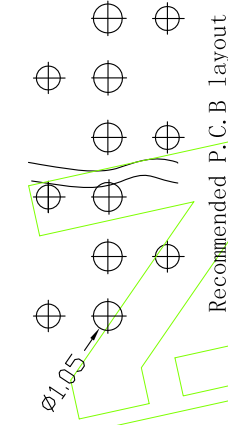

TYPE B

Recommended P, C, B layout

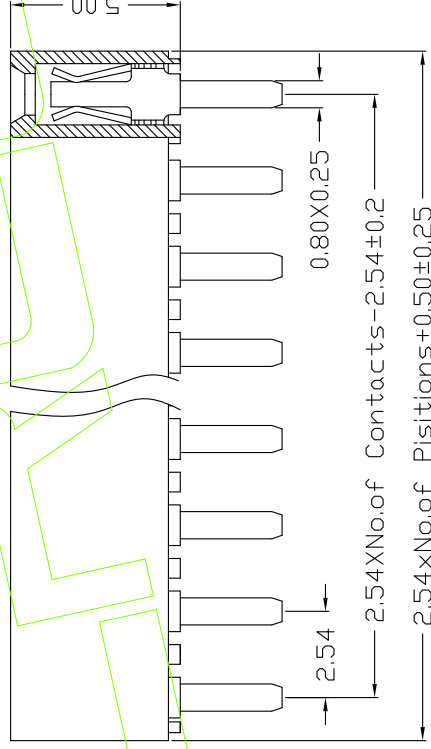

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION		DRAW	LI	ANR	20/06/09		SCALE		Fit	H		
							X.X	±0.40						UNIT	MM		PART NO.	TITLE:	Customer No.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	±0.25	±0.15	±3°	±0.15	DESIGN	张涛	罗荣军	罗荣军	罗荣军	1/1	CHECK	DESIGN	3F50W-11XXXXXX	2.54单排母 塑高5.0 蜈蚣脚 脚距5.08	
A0	12/05/18	NEW							CHECK										
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	Angle	Angle	APPROVE	APPROVE	APPROVE	APPROVE	APPROVE	PROJ.	PROJ.	PROJ.	PROJ.	PROJ.	PROJ.