

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


温度范围: -40°C to +105°C

温度范围: -40°C to +105°C




Ordering Information

3F50M- 21 XX XX X U X 2 Δ

No. of Pins Per Row	Contact Plating	Insulator Material	Packing
1-40P	G=Gold Flash	D: PA6T	A: PE Bag
	G1=10" Gold	C: PA6T	B: Tape & Reel+CAP
	G2=30" Gold	D: LCP	C: Tube
	G3=50" Gold		D: Tube+CAP
	G4=100" Gold		E: Tray
	G5=150" Gold		F: Tape & Reel
	G6=300" Gold		
	P0=Gold Flash		
	F=10" Gold/Tin		
	F4=30" Gold/Tin		
	F5=50" Gold/Tin		
	F6=100" Gold/Tin		
	F7=150" Gold/Tin		
	F8=300" Gold/Tin		
	Sn=Tin		
	SM=Matte Tin		

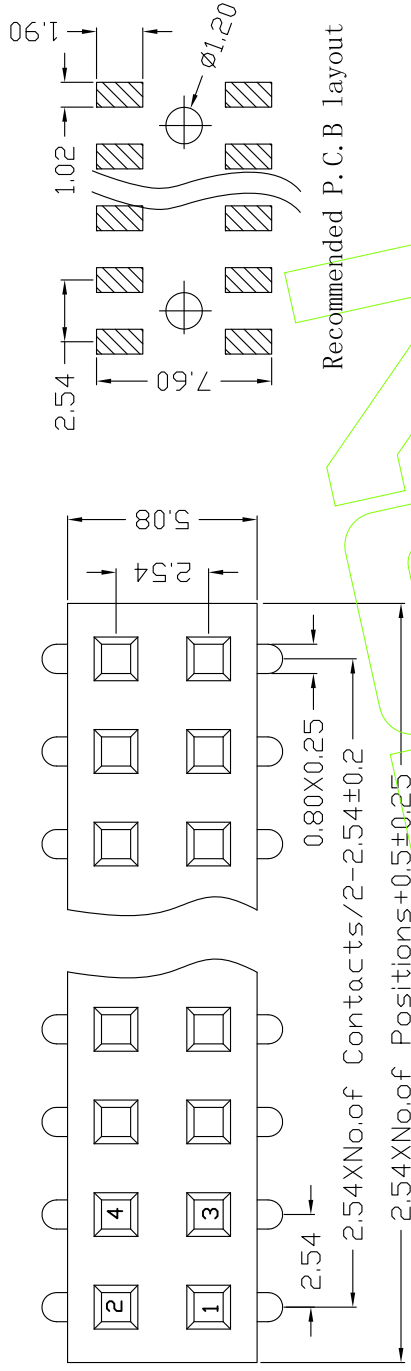

Recommended P.C.B layout

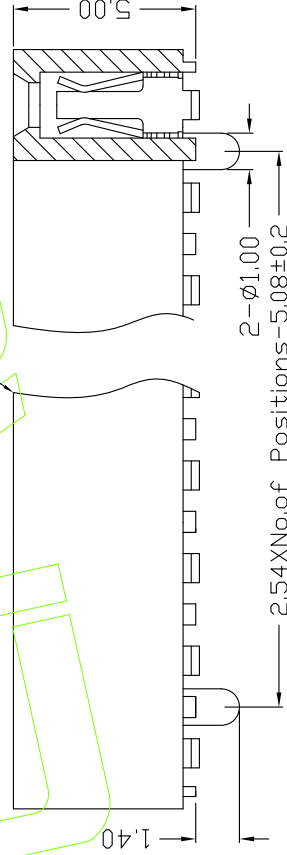

LIRCON		连润电子有限公司		Lrcon Electronics Co., Ltd	
20/06/09		DESIGN		MM	
21/06/18		CHECK		A4	
REV		DATE		SHEET	
MODIFICATION DESCRIPTION		CHANGE		PROJ.	
NEW		APPROVE		Customer No.	
Improve numbering instructions (完善编号与标注说明)		张涛		3F50M-21XXXXXU2	
2.54双排母 塑高5.0 U型 SMT 带柱 PC脚0.80		罗荣军		PART NO.	
		方里军		TITLE:	
				APPROVE	
				10	