

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

3F50M- 21 XX XX X U X 1 Δ

No. of Pins Per Row 2/40P	Contact Plating G=Gold Flash G1=1U" Gold G2=3U" Gold G3=5U" Gold G4=10U" Gold G5=15U" Gold G6=30U" Gold F=1U" Gold/Tin F1=3U" Gold/Tin F2=5U" Gold/Tin F3=10U" Gold/Tin F4=15U" Gold/Tin F5=30U" Gold/Tin Sn=Sn Sn=Matte Tin	Insulator Material D: PA6T C: PA9T D: LCP	Insulator A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel	Packing
---------------------------------	---	---	---	---------

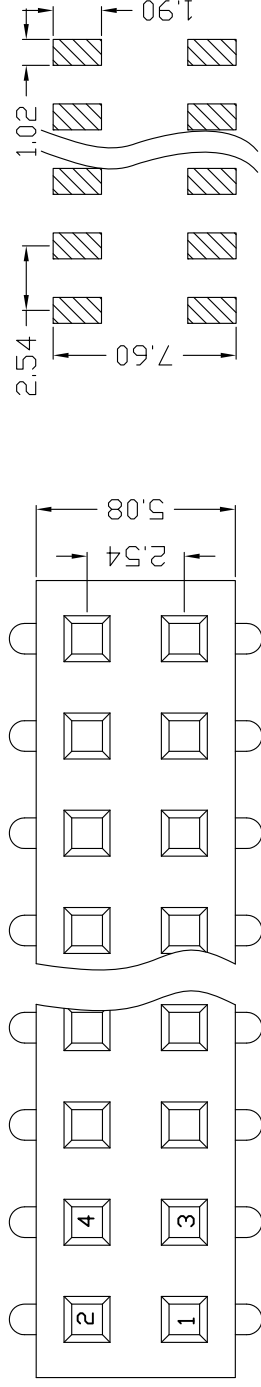

Recommended P.C.B layout

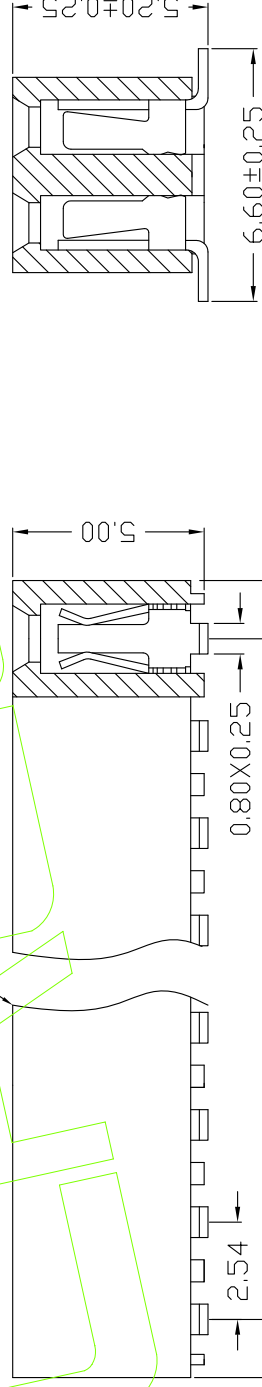

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	CHECK	APPROVE	SCALE	UNIT	Fit	MM
A1	20/06/09	Improve numbering instructions (完善编号与标注说明)	Δ	张涛	±0.40	±0.25	±0.15	±3°	DESIGN	CHECK	APPROVE	A4	1/1	DESIGN	3F50M-21XXXXXU1
A0	12/05/18	NEW	—	—	—	—	—	—	CHECK	CHECK	APPROVE	1/1	1/1	CHECK	2.54双排母 塑高5.0 SMT U型 PC脚0.80
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	CHECK	APPROVE	SCALE	UNIT	Fit	MM