

HSF RoHS

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

端子：黄铜/磷青铜

2 特性 (characteristics).

额定电压: 5 AMV
Rating Current: 3 AMP

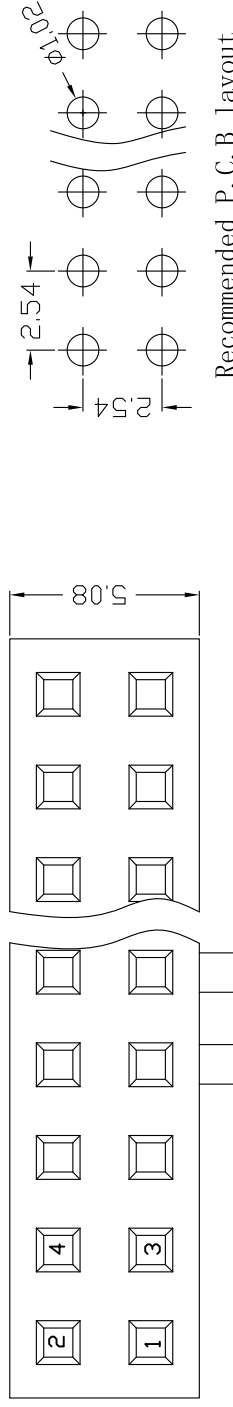
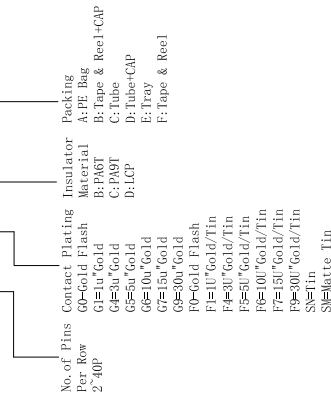
接触电阻: $20\text{ m}\Omega$ MAX.
Contact Resistance: $20\text{ m}\Omega$ MAX.

绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000

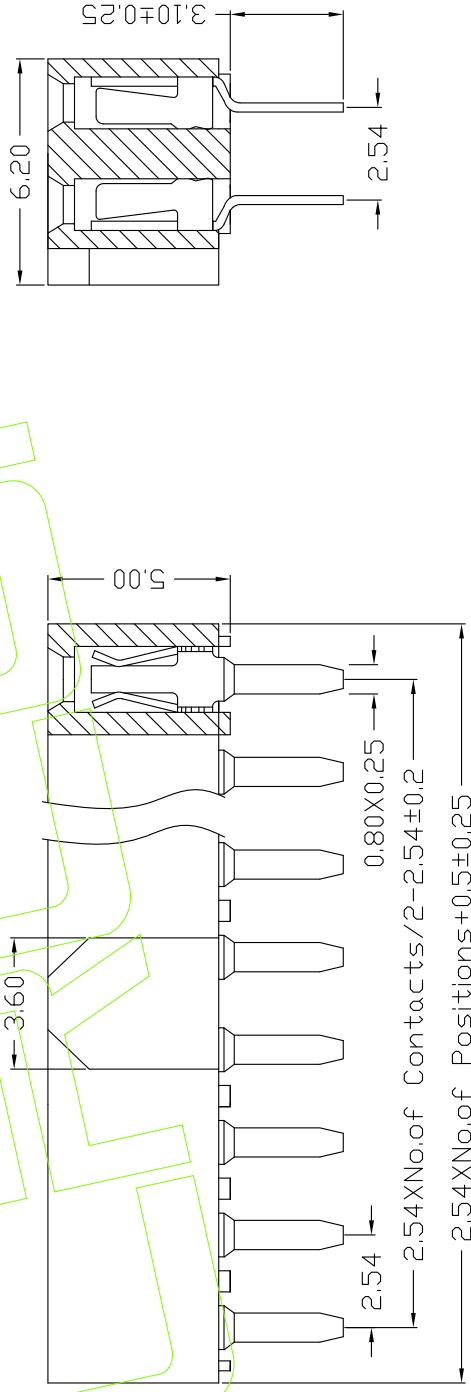
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

Ordering Information

3F50S-21 XX XX X U X 3 $\triangle_{A1}$ 

Recommended P. C. B layout

[illegible]