



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C



温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


Ordering Information

3F45M- 11 XX XX X U X X Δ

No. of Pins	Contact Plating	Insulator	Packing
Per Row			
1-40P	G=Gold Flash	A: PA6T	A: TYPE A
	G=30" Gold	B: PA6T	B: TYPE B
	G=50" Gold	C: PA6T	C: Tube
	G=100" Gold	D: LCP	D: Tube-CAP
	G=150" Gold		E: Tray
	G=300" Gold		F: Tape & Reel
	P=Gold Flash		
	F=10" Gold/Tin		
	F=30" Gold/Tin		
	F=50" Gold/Tin		
	F=100" Gold/Tin		
	F=150" Gold/Tin		
	F=300" Gold/Tin		
	Sn=Sn		
	Sn=Matte Tin		

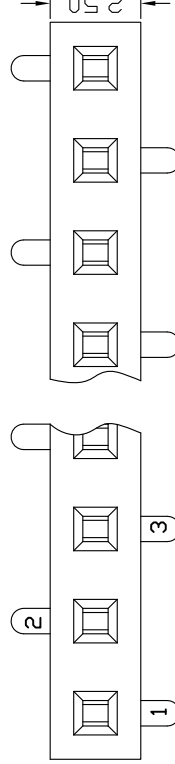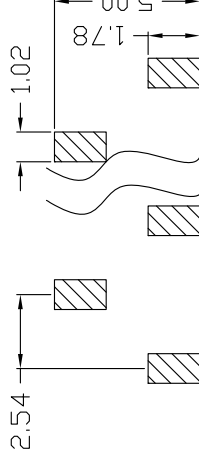


TYPE A

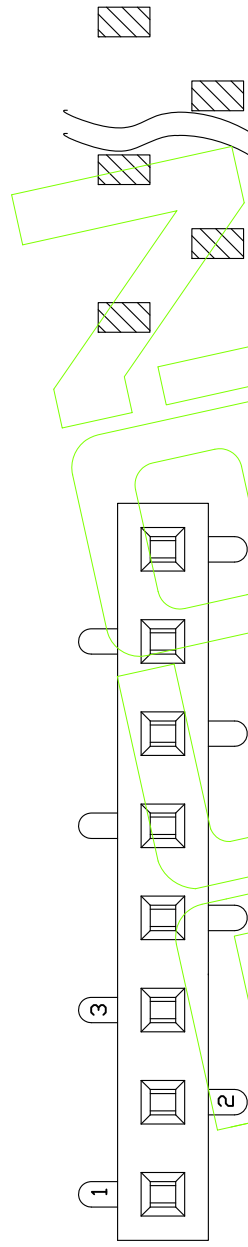

TYPE B

Recommended P.C.B layout

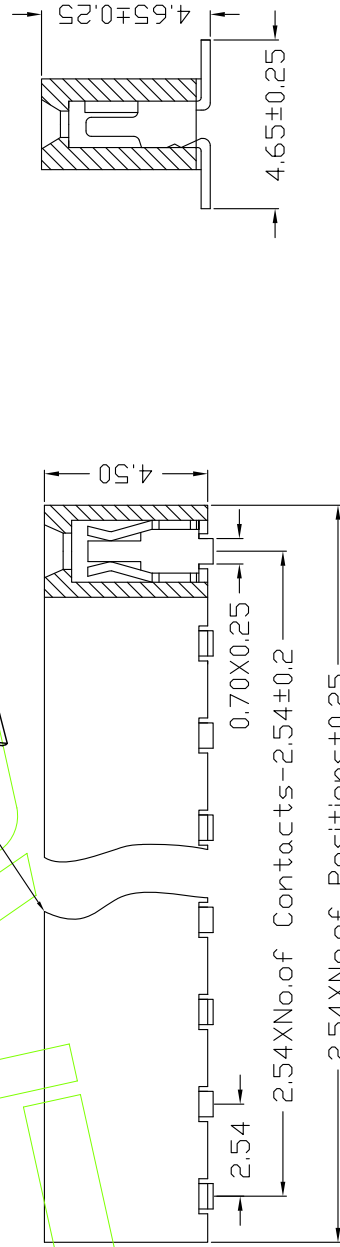

LRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO.	3F45M-11XXXXXX
TITLE:	2.54单排母 塑高4.5 SMT U型 正/反脚位
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	CHECK	SIZE	UNIT	SCALE	Fit
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	± 0.40		DESIGN	张涛					
A0	12/05/18	NEW			X.XX	± 0.25		CHECK	罗荣军					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	CHECK	SIZE	UNIT	SCALE	Fit

连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO.	3F45M-11XXXXXX
TITLE:	2.54单排母 塑高4.5 SMT U型 正/反脚位
Customer No.	