

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 3 AMP

额定电压: 300V

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V

温度范围: -40°C to +105°C

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

Ordering Information

3F35S- 21 XX XX X U X 1 Δ



No. of Pins
Per Row
2-40P

Contact Plating
G=Gold Flash
G1=10" Gold
G2=30" Gold
G3=50" Gold
G4=100" Gold
G5=150" Gold
G6=300" Gold
F=Gold Flash
F1=10" Gold/Tin
F2=30" Gold/Tin
F3=50" Gold/Tin
F4=100" Gold/Tin
F5=150" Gold/Tin
F6=300" Gold/Tin
S=Sn
S1=Matte Tin

Insulator
Material
D: PA6T
C: PA6T
D: LCP

Packing
A: PE Bag
B: Tape & Reel-CAP
C: Tube
D: Tube-CAP
E: Tray
F: Tape & Reel

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION		DRAW	LI	ANR	20/06/09	SCALE		Fit	H	
							X.X	±0.40					UNIT	MM		DESIGN	PART NO.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.XX	±0.25			DESIGN	张涛			A4				3F35S-21XXXXXU1
A0	12/05/18	NEW			X.XXX	±0.15			CHECK	罗荣军			1/1				2.54双排母 塑高3.55 U型 180度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	Angle	±3°	APPROVE	方里军			PROJ.	APPROVE		CUSTOMER No.	

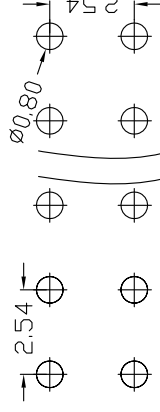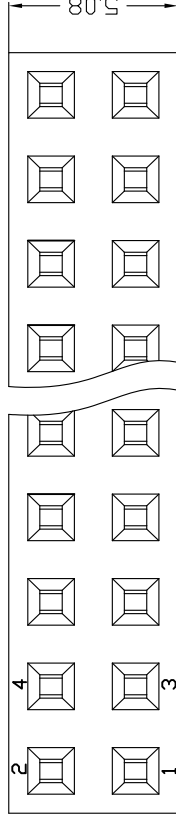

Recommended P.C.B layout

