



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

2F72R- 21 XX XX X P X X Δ

No. of Pins Per Row	Contact Plating	Insulator Material	Packing
2~40P	G=Gold Flash	D: PA6T	A: PE Bag
	G1=10" Gold	C: PA6T	B: Tape & Reel+CAP
	G2=30" Gold	D: LCP	C: Tube
	G3=50" Gold		D: Tube+CAP
	G4=100" Gold		E: Tray
	G5=150" Gold		F: Tape & Reel
	G6=300" Gold		
	P0=Gold Flash		
	F1=10" Gold/Tin		
	F2=30" Gold/Tin		
	F3=50" Gold/Tin		
	F4=100" Gold/Tin		
	F5=150" Gold/Tin		
	F6=300" Gold/Tin		
	Sn=Sn		
	Sn=Matte Tin		

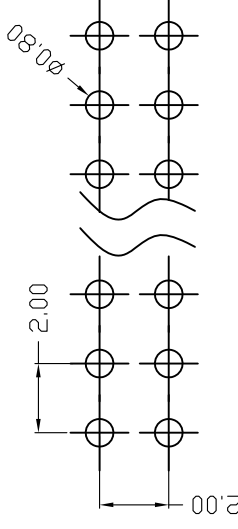

Recommended P.C.B layout

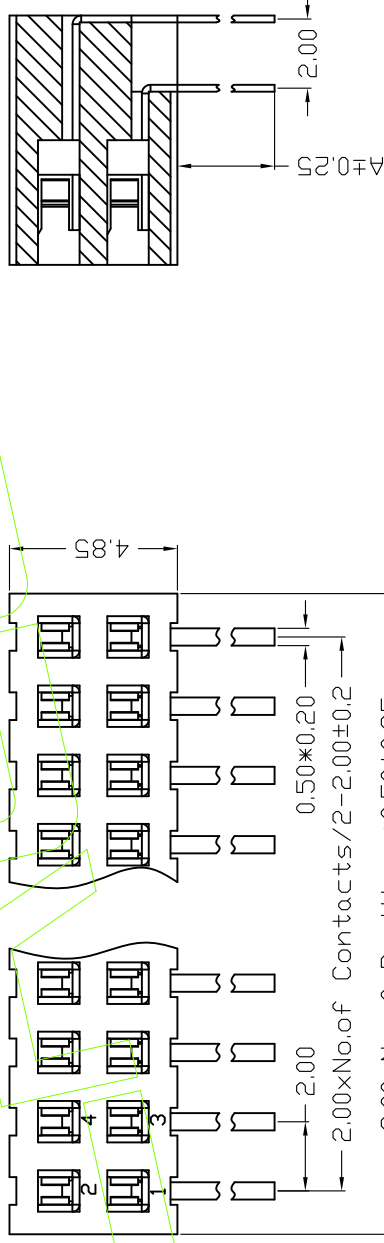

DIM"A" 2.80 3.20

LRCON
连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	PROJ.		APPROVE	Customer No.	TITLE:	CHECK	DESIGN	PART NO.	2F72R-21XXXXPXX	
																	SIZE	A4
A1	20/06/09	Improve numbering instructions (完善编号标注说明)		张涛	X.XX	±0.25												
A0	12/05/18	NEW	——	——	Angle	±0.15	CHECK	罗荣军	SHEET	1/1								2.0双排母 塑高7.2 90度 上插式
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	PROJ.		APPROVE	Customer No.	TITLE:	CHECK	DESIGN	PART NO.	2F72R-21XXXXPXX	