

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

Ordering Information


2F63M- 21 XX XX X Y X 1 Δ

No. of Pins
Per Row
2-40P


Contact Plating
G=Gold Flash
G1=1u" Gold
G2=3u" Gold
G3=5u" Gold
G4=10u" Gold
G5=15u" Gold
G6=30u" Gold
F=1u" Gold/Tin
F1=3u" Gold/Tin
F2=5u" Gold/Tin
F3=10u" Gold/Tin
F4=15u" Gold/Tin
F5=30u" Gold/Tin
S=Sn
S1=Matte Tin

Insulator
Material
D: PA6T
C: PA9T
D: LCP

Packing
A: PE Bag
B: Tape & Reel+CAP
C: Tube
D: Tube+CAP
E: Tray
F: Tape & Reel

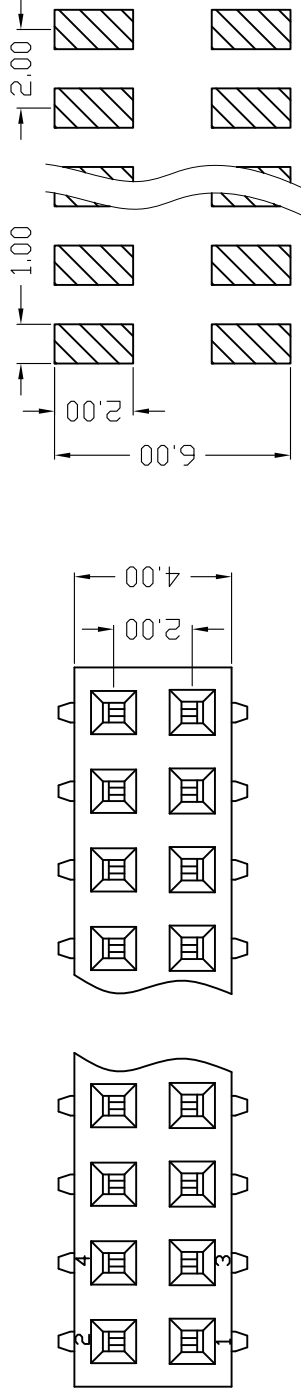

Recommended P.C.B layout

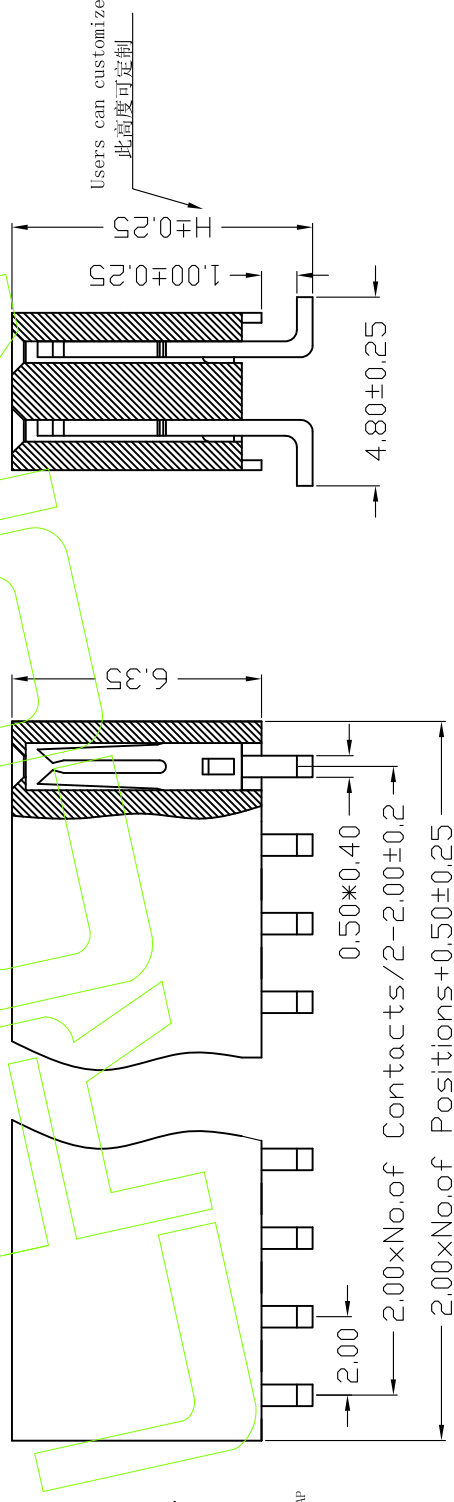

DIM"H" 7.75

Lrcon 连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	F	DRAW	LI	ANR	20/06/09	SCALE	UNIT	Fit	H
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	±0.40	DESIGN	张涛	DESIGN	张涛	张涛	20/06/09	UNIT	A4	DESIGN	2F63M-21XXXXXX1
A0	12/05/18	NEW	—	—	X.XX	±0.25	CHECK	罗荣军	CHECK	罗荣军	罗荣军	12/05/18	SHEET	1/1	CHECK	2.0双排母 塑高6.35 Y型 SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	F	DRAW	LI	ANR	20/06/09	SCALE	UNIT	Fit	Customer No.