

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

额定电压: 2 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


温度范围: -40°C to +105°C

温度范围: -40°C to +105°C



Ordering Information

2F63R- 31 XX XX X Y X 1 Δ

No. of Pins Per Row 3-40P	Contact Plating G=Gold G=10" Gold G=30" Gold G=50" Gold G=100" Gold G=150" Gold G=300" Gold F=Gold Flash F=10" Gold/Tin F=30" Gold/Tin F=50" Gold/Tin F=100" Gold/Tin F=150" Gold/Tin F=300" Gold/Tin Sn=Sn Sn=Matte Tin	Insulator Material B: PA6T C: PA9T D: LCP	Packing A: PE Bag B: Tape & Reel-CAP C: Tube D: Tube-CAP E: Tray F: Tape & Reel
---------------------------------	--	---	---

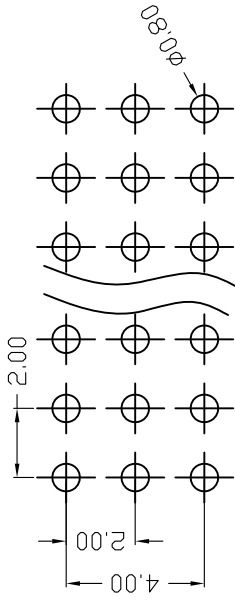

Recommended P.C.B layout

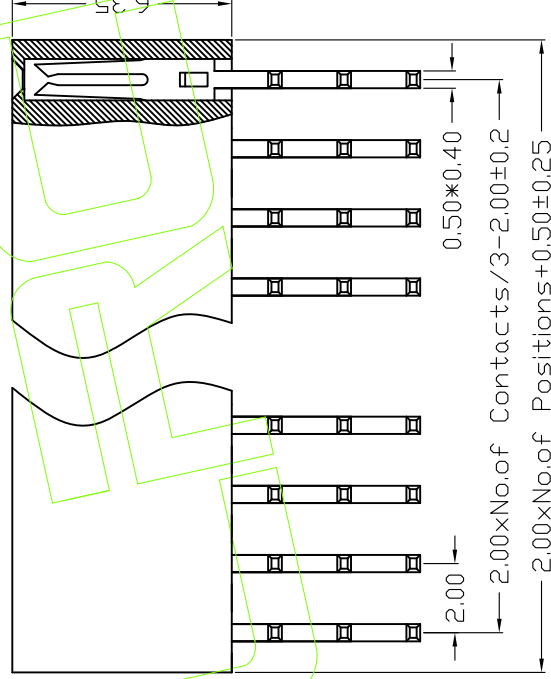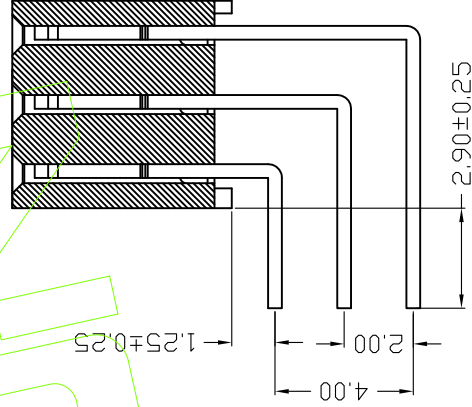

LRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	MM	2F63R-31XXXXXX1	2.0排母 三排 塑高6.35 Y型 90度
A0	12/05/18	NEW	张涛	CHECK	1/1	TITLE:	Customer No.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	SHEET	