

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

銅 : 黄銅/磷青銅
Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

額定電流: 2 AMP

额定电压: 2 AMV
Rating Current: 2 AMP.

接觸阻抗: 20 mΩ MAX

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min

绝缘电阻: 1000 MΩ min.
Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

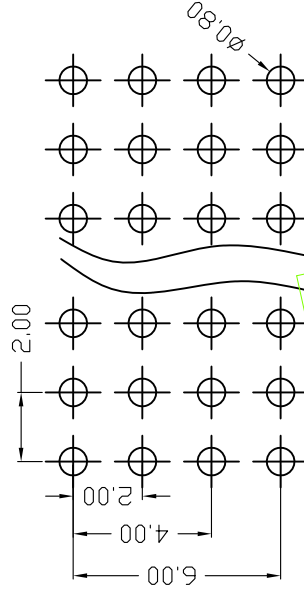
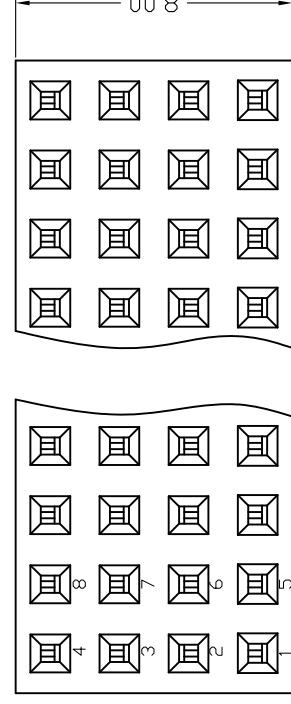
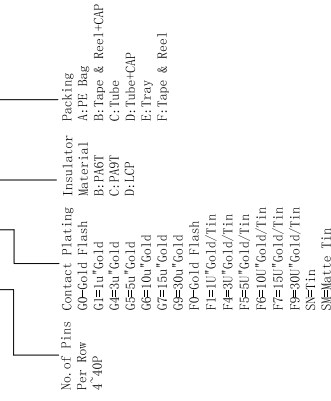
耐电压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

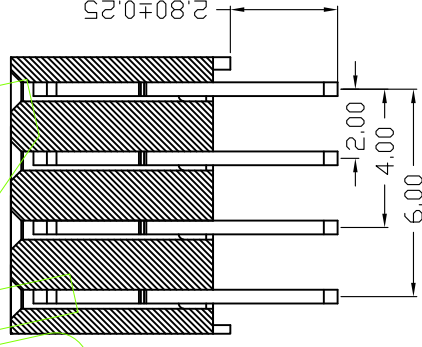
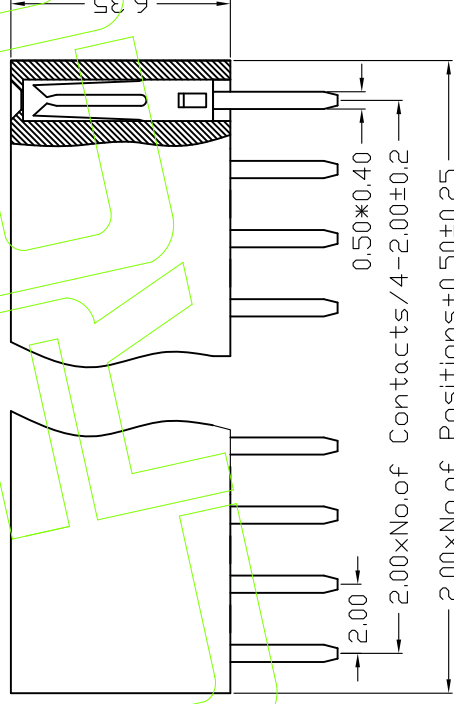
温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

Temperature range: -40°C to +105°C

Ordering Information

2F63S-41 XX XX XY X 1 Δ_{A1}^1 

~~Recommended P.C.B layout~~

[illegible]