



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

额定电流: 2 AMP

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

2F63S- 22 XX XX X Y X 2 Δ

No. of Pins Per Row 2/40P	Contact Plating G=Gold Flash G1=1U" Gold G2=3U" Gold G3=5U" Gold G4=10U" Gold G5=15U" Gold G6=30U" Gold F0=Gold Flash F1=1U" Gold/Tin F2=3U" Gold/Tin F3=5U" Gold/Tin F4=10U" Gold/Tin F5=15U" Gold/Tin F6=30U" Gold/Tin Sn=Sn Sn=Matte Tin	Insulator Material D: PA6T C: PA9T D: LCP	Insulator Material A: PE Bag B: Tape & Reel-CAP C: Tube D: Tube-CAP E: Tray F: Tape & Reel	Packing A: PE Bag B: Tape & Reel-CAP C: Tube D: Tube-CAP E: Tray F: Tape & Reel
---------------------------------	---	---	---	---

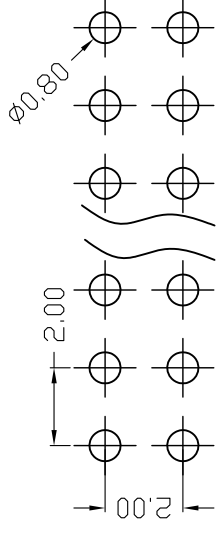

Recommended P.C.B layout

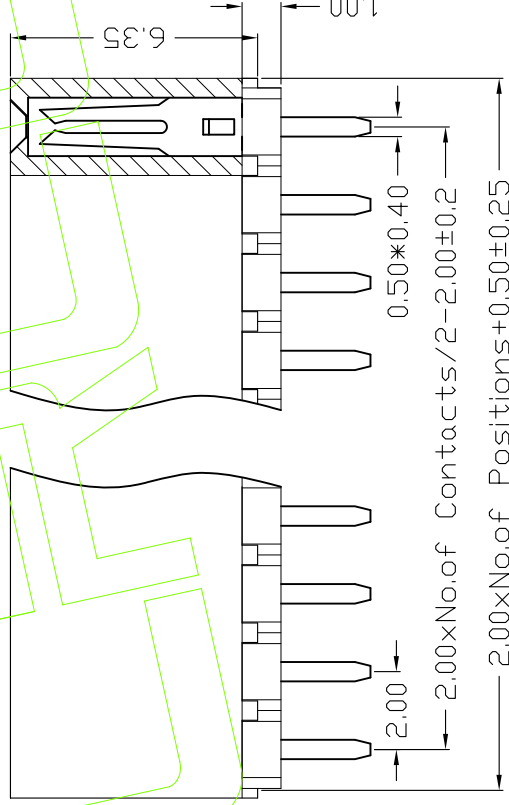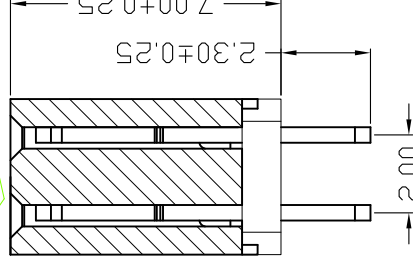

LIRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	2F63S-22XXXXXX2	PART NO.
A0	12/05/18	NEW	张涛	CHECK	2.0双排母 塑高6.35 加塑胶 180度 Y型	TITLE:
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Customer No.	