

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

2F63S- 21 XX XX X Y X 2 Δ

No. of Pins Pin Row 2 40P	Contact Plating G: Gold Flash G1=1U" Gold G2=3U" Gold G3=5U" Gold G4=10U" Gold G5=15U" Gold G6=30U" Gold F: 1U" Gold/Tin F1=3U" Gold/Tin F2=5U" Gold/Tin F3=10U" Gold/Tin F4=15U" Gold/Tin F5=30U" Gold/Tin S: Tin S1=Matte Tin	Insulator Material D: PA6T C: PA9T D: LCP	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
---------------------------------	--	---	---

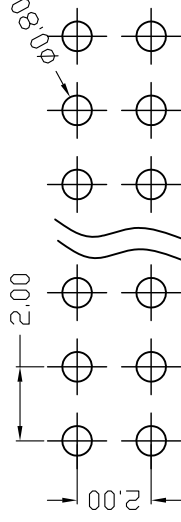

Recommended P.C.B layout

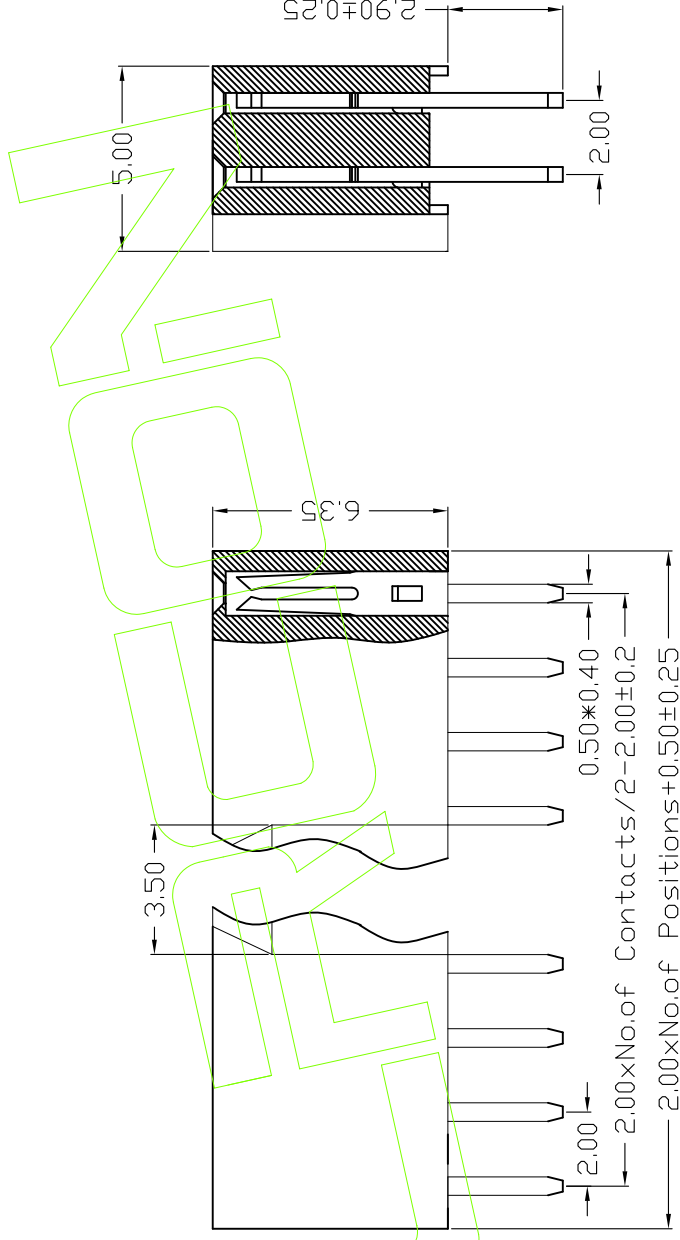**LRCON**
连润电子有限公司
Lrcon Electronics Co., Ltd

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	张涛	20/06/09	UNIT	MM	Fit
A0	12/05/18	NEW	张涛	CHECK	罗荣军		SIZE	A4	DESIGN
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE		SHEET	1/1	CHECK
							PROJ.	APPROVE	APPROVE
							TITLE:	2.0双排母 塑高6.35 Y型 180度 带凸	
							CUSTOMER No.		