

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子：黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 10

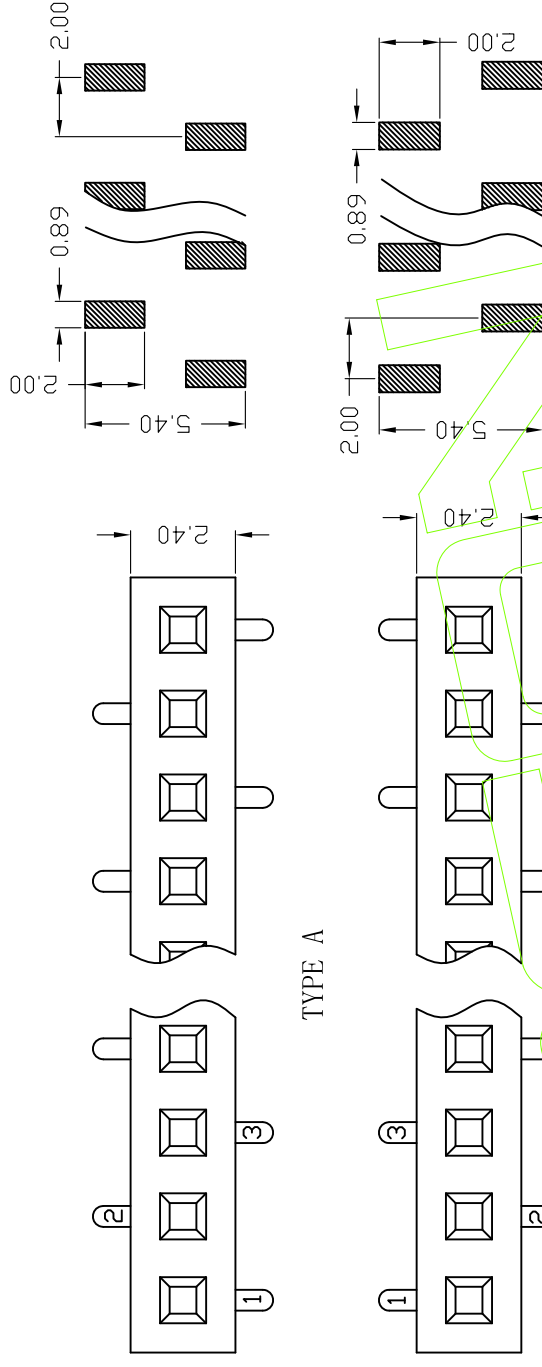
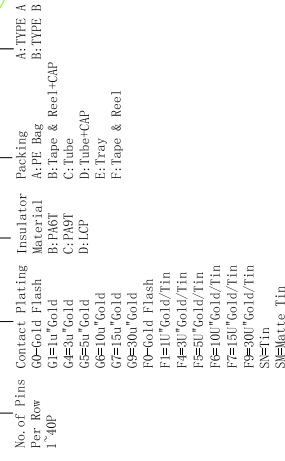
耐电压: AC 500V.
Withstanding Voltage: AC 500V.

Withstanding voltage: AC 500V.
温度范围 -40°C to +105°C

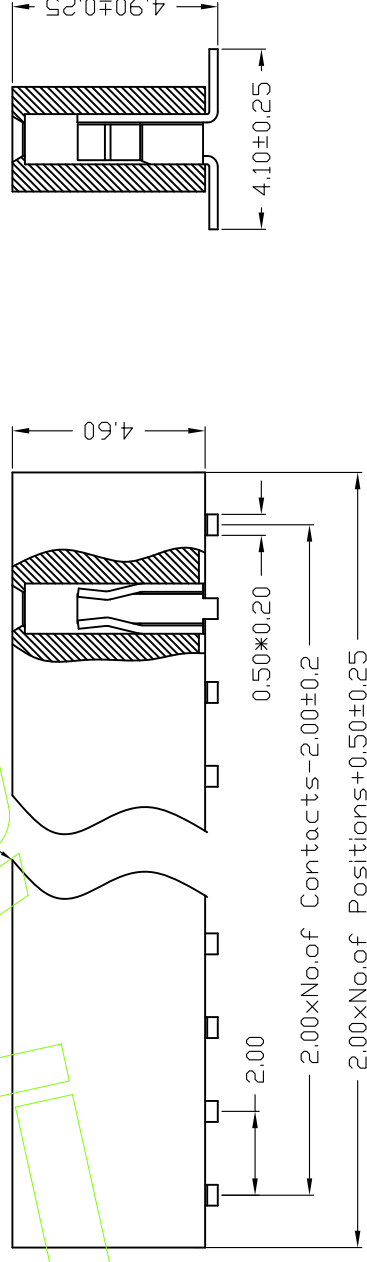
温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

2F46M- 11 XX XX X U X X Δ_{A1} 

Recommended P.C.B layout

[illegible]