



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

额定电压: 2 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

Ordering Information


2F46S- 21 XX XX X U X 1 Δ

No. of Pins
Per Row
2-40P


Contact Plating
G=Gold
G=30" Gold
G=50" Gold
G=100" Gold
G=150" Gold
G=300" Gold
P=Gold Flash
F=10" Gold/Tin
F=30" Gold/Tin
F=50" Gold/Tin
F=100" Gold/Tin
F=150" Gold/Tin
F=300" Gold/Tin
S=Sn
S=Matte Tin

Insulator
Material
B: PA6T
C: PA9T
D: LCP

Packing
A: PE Bag
B: Tape & Reel-CAP
C: Tube
D: Tube-CAP
E: Tray
F: Tape & Reel

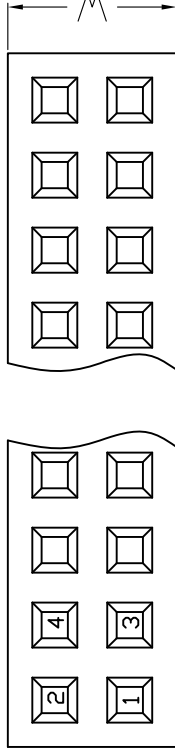

Recommended P.C.B layout

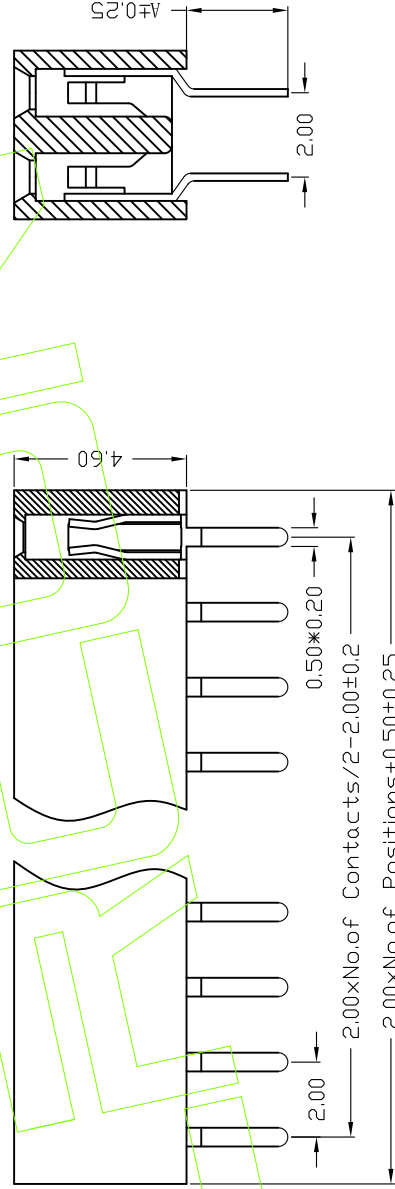

DIM"A"	2.4	2.8
DIM"W"	4.0	4.5

Lrcon 连润电子有限公司		Lrcon Electronics Co., Ltd	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	
NEW		NEW	
DATE		MODIFICATION DESCRIPTION	
REV		Customer No.	
A1		2F46S-21XXXXXU1	
A0		2.0双排母 塑高4.6 180度 U型	
20/06/09		21/06/09	
Improve numbering instructions (完善编号与标注说明)		Improve numbering instructions (完善编号与标注说明)	