

HSF RoHS

## Specifications

备注(Remark)

## 1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子: 黄铜/磷青铜

Contact :Brass/Phosphor bronze

## 2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M $\Omega$  min.

Insulating Resistance: 1000 M $\Omega$  min.

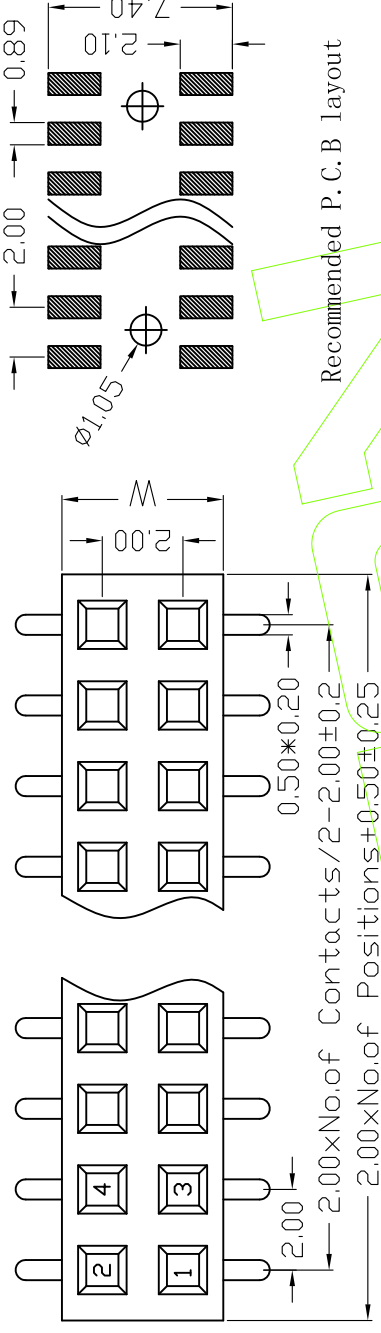
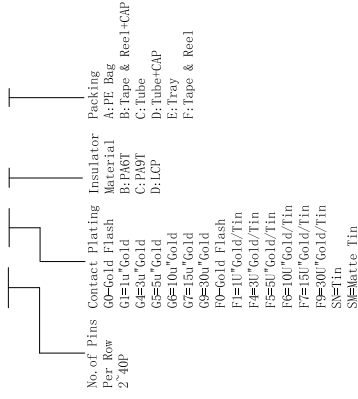
耐电压: AC 500V.

Withstanding Voltage: AC 500V.

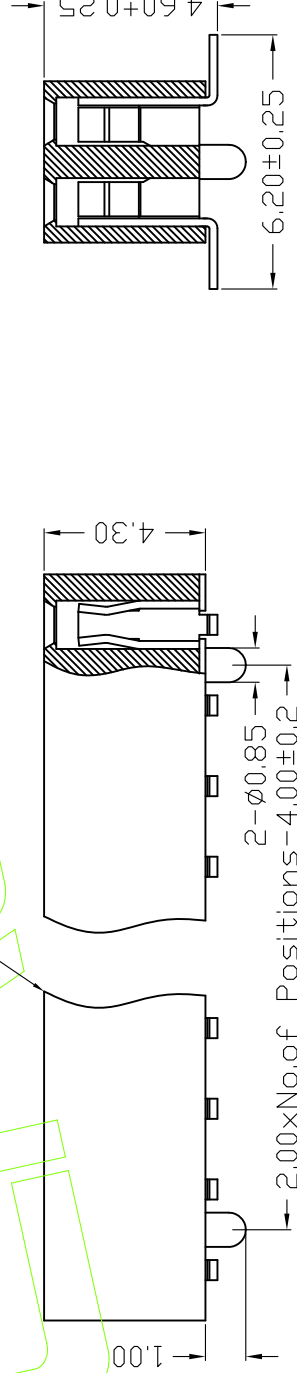
温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C

## Ordering Information

2F43M-21 XX XX X U X 2  $\triangle_{A1}$ 

Recommended P.C.B layout



|        |     |     |
|--------|-----|-----|
| DIM"W" | 4.0 | 4.5 |
|--------|-----|-----|

[illegible]