

HSF RoHS
Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Operation Temperature: -40°C to +105°C




Ordering Information

2F43M- 21 XX XX X U X 3 Δ

- No. of Pins
Per Row
2/40P
- Contact Plating
G=Gold Flash
G1=1U" Gold
G2=3U" Gold
G3=5U" Gold
G4=10U" Gold
G5=15U" Gold
G6=30U" Gold
F=1U" Gold/Tin
F1=3U" Gold/Tin
F2=5U" Gold/Tin
F3=10U" Gold/Tin
F4=15U" Gold/Tin
F5=30U" Gold/Tin
Sn=Sn
Sn=Matte Tin
- Insulator
Material
D: PA6T
C: PA6T
D: LCP
- Material
A: PE Bag
B: Tape & Reel+CAP
C: Tube
D: Tube+CAP
E: Tray
F: Tape & Reel
- Packing

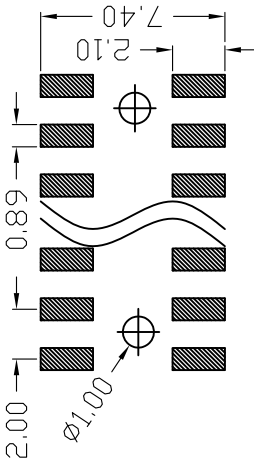

Recommended P.C.B layout

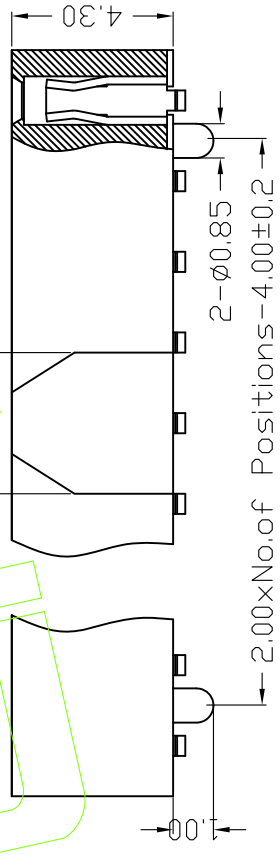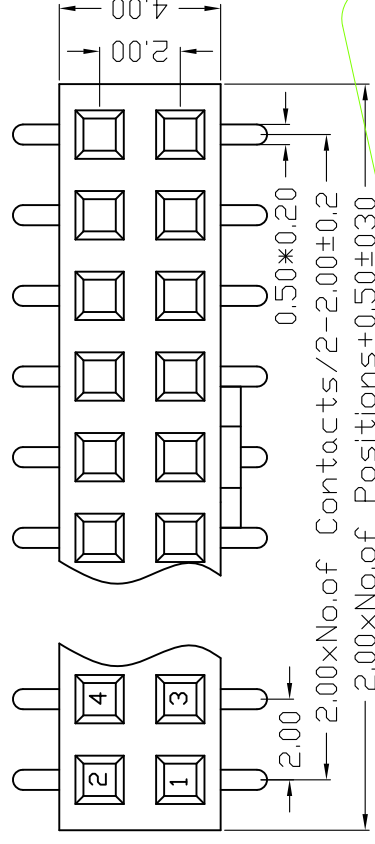

		LIRCON		连润电子有限公司		Lrcon Electronics Co., Ltd	
H	A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	DESIGN	PART NO.
	A0	12/05/18	NEW	—	—	CHECK	TITLE:
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	Customer No.
		2F43M-21XXXXXU3		2.0双排母 塑高4.3 SMT带柱 U型 带凸点			