

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F. UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact :Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

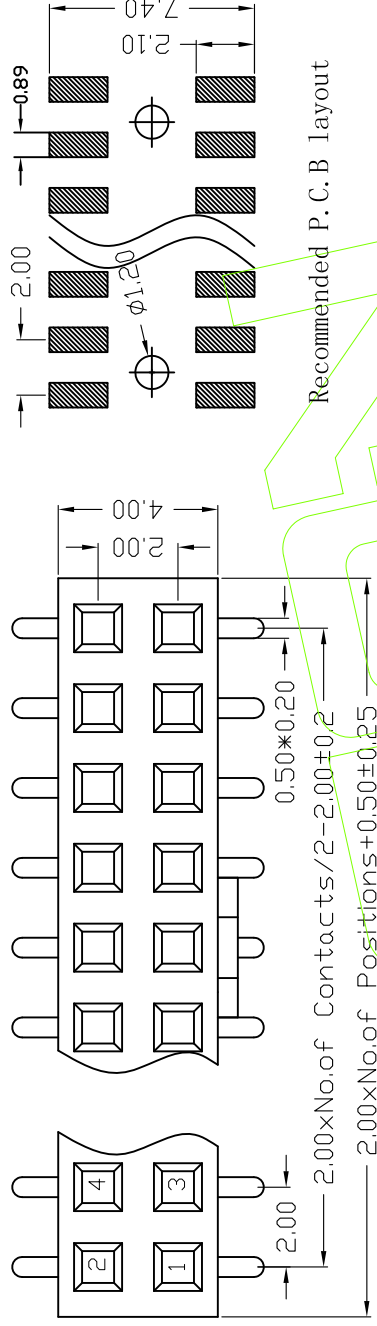
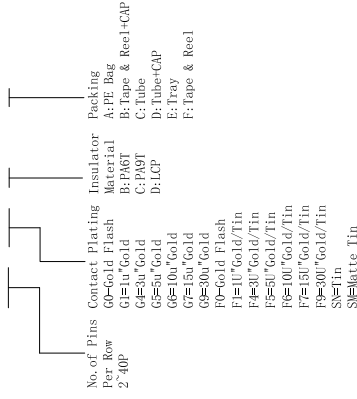
耐电压: AC 500V.

Withstanding Voltage: AC 500V.
温度范围 -40°C ~ +105°C


温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

Temperature Range: -40 °C to +105 °C

Ordering Information

2F40M- 21 XX XX X U X 3 $\triangle_{A1}$ 

Recommended P.C.B layout

[illegible]