



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

温度范围: -40°C to +105°C

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

2F40M- 11 XX XX X U X X Δ

No. of Pins Per Row	Contact Plating	Insulator Material	Packing
1~40P	G=Gold Flash	D: PA6T	A: TYPE A
	G1=1u" Gold	E: PA6T	B: TYPE B
	G2=3u" Gold	C: PA6T	C: Tube
	G3=5u" Gold	D: LCP	D: Tube+Cap
	G4=10u" Gold		E: Tray
	G5=15u" Gold		F: Tape & Reel
	G6=30u" Gold		
	F0=Gold Flash		
	F1=1u" Gold/Tin		
	F2=3u" Gold/Tin		
	F3=5u" Gold/Tin		
	F4=10u" Gold/Tin		
	F5=15u" Gold/Tin		
	F6=30u" Gold/Tin		
	Sn=Sn		
	Sn=Matte Tin		

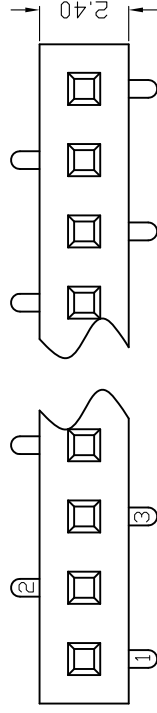


TYPE A



TYPE B

Recommended P.C.B layout

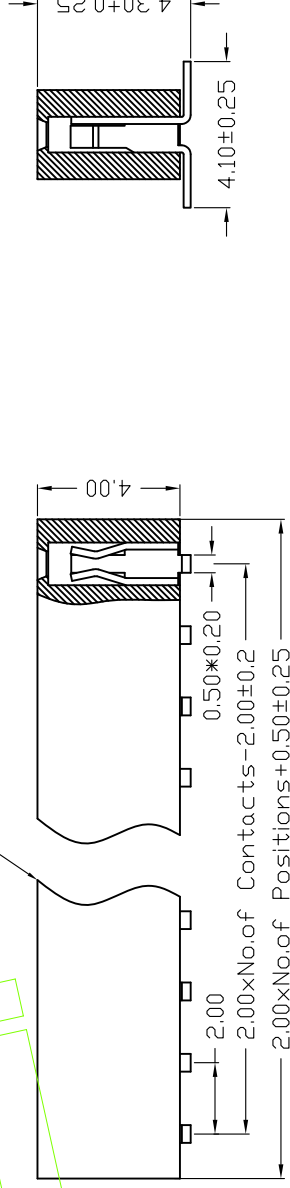

LIRCON 连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	CHECK	SIZE	UNIT	SCALE	Fit	PART NO.	TITLE:	Customer No.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	± 0.40		张涛	DESIGN		A4	MM			2F40M-11XXXXXX		
A0	12/05/18	NEW			X.XX	± 0.25		罗荣军	CHECK		1/1					2.0 单排母 型高4.0 SMT U型 正/反脚位	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	ANGLE	TOL	APPROVE	DESIGN	CHECK	SIZE	UNIT	SCALE	Fit	PART NO.	TITLE:	Customer No.