



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 2 AMP

额定电压: 2 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

耐压: AC 500V.

绝缘电压: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

Ordering Information


2F35S- 21 XX XX X U X 1 Δ

No. of Pins
Per Row
2-40P



Contact Plating
G=Gold Flash
G1=1u" Gold
G2=3u" Gold
G3=5u" Gold
G4=10u" Gold
G5=15u" Gold
G6=30u" Gold
G7=50u" Gold
G8=100u" Gold
G9=300u" Gold
F=1u" Gold/Tin
F4=30u" Gold/Tin
F5=50u" Gold/Tin
F6=100u" Gold/Tin
F7=150u" Gold/Tin
F8=300u" Gold/Tin
S=Sn
S1=Matte Tin

Insulator
Material
D: PA6T
C: PA6T
D: LCP

Packing
A: PE Bag
B: Tape & Reel-CAP
C: Tube
D: Tube-CAP
E: Tray
F: Tape & Reel

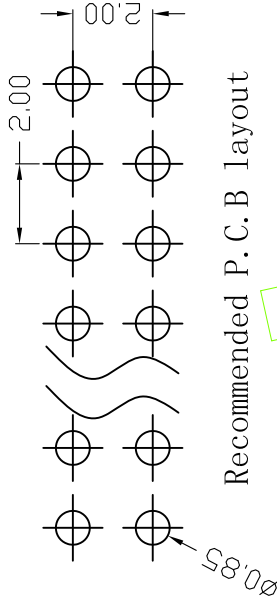

Recommended P.C.B layout

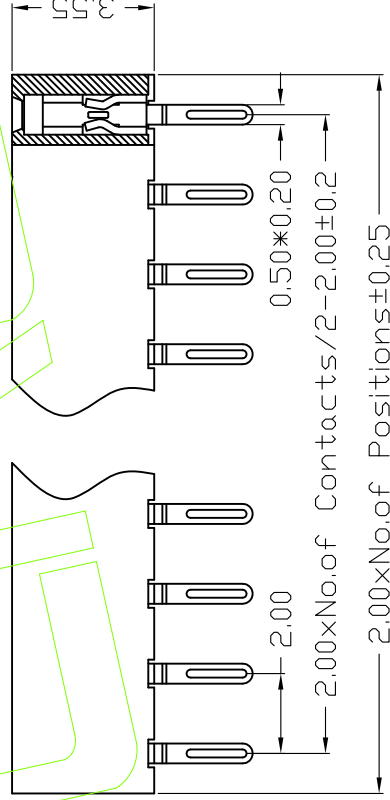

LARCON 连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION		DRAW	LI	IANR	20/06/09	SCALE		Fit	H		
							X.X	±0.40					UNIT	MM		PART NO.	TITLE:	Customer No.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	XX	±0.25	XX	±0.25	DESIGN	张涛			A4	DESIGN		2F35S-21XXXXXU1		
A0	12/05/18	NEW			Angle	±3°	XXX	±0.15	CHECK	罗荣军			1/1	CHECK		2.0 双排母 塑高3.55 U型 180度 免焊式		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	APPROVE	APPROVE	APPROVE	APPROVE	APPROVE	PROJ.	APPROVE	APPROVE			