

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接觸阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX;
Contact Resistance: 20

绝缘阻抗: 1000 MΩ min.

绝缘电阻: 1000 M Ω min.
Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

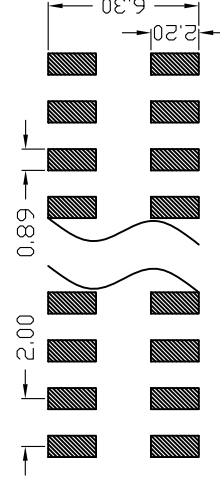
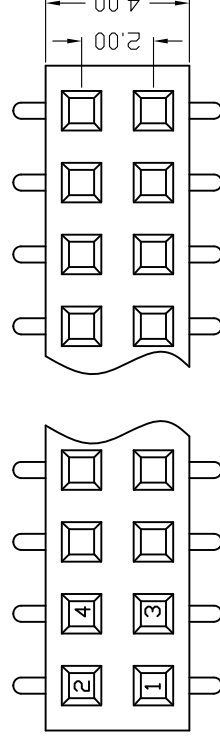
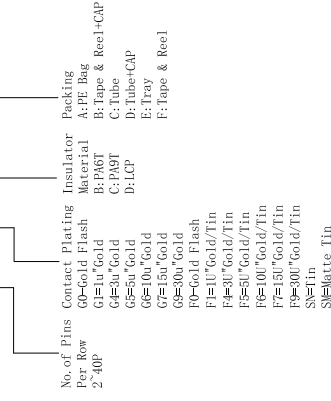
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

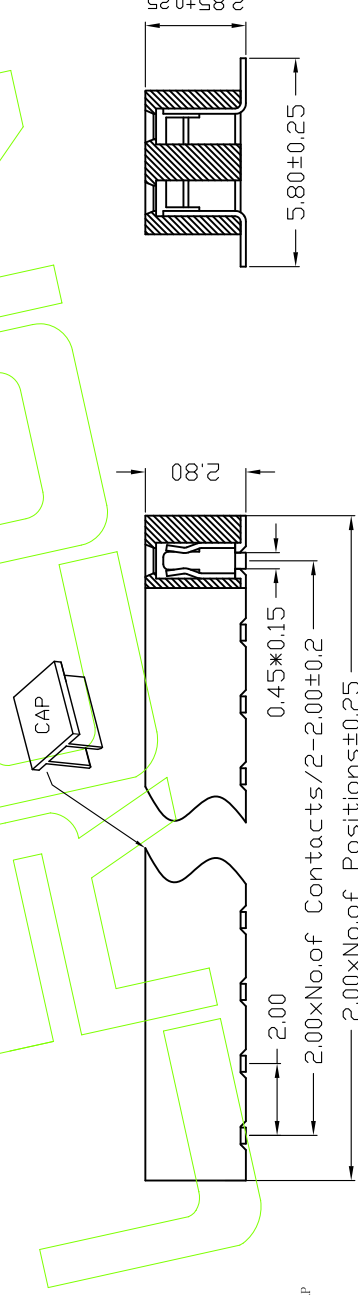
温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

temperature range: 40–100 °C

Ordering Information

2F28M-21 XX XX X U X 1 Δ_{A1} 

Recommended P.C.B layout

[illegible]