

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

端子：黄铜/磷青铜

Contact :Brass/Phosphor bronze

2. 特性 (characteristics):

额定电流: 2 AMP

Current Rating: 2 AMP.

接觸阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX;
Contact Resistance: 20

绝缘阻抗: 1000 M Ω min.

绝缘电阻: 1000 MΩ 耐压: 1000 V
Insulating Resistance: 1000 MΩ

耐电压: AC 500V.

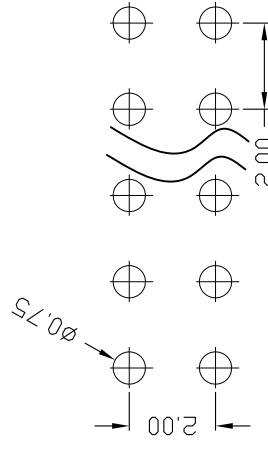
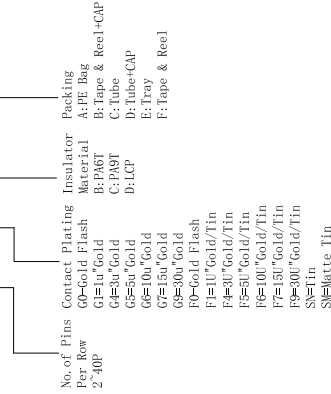
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

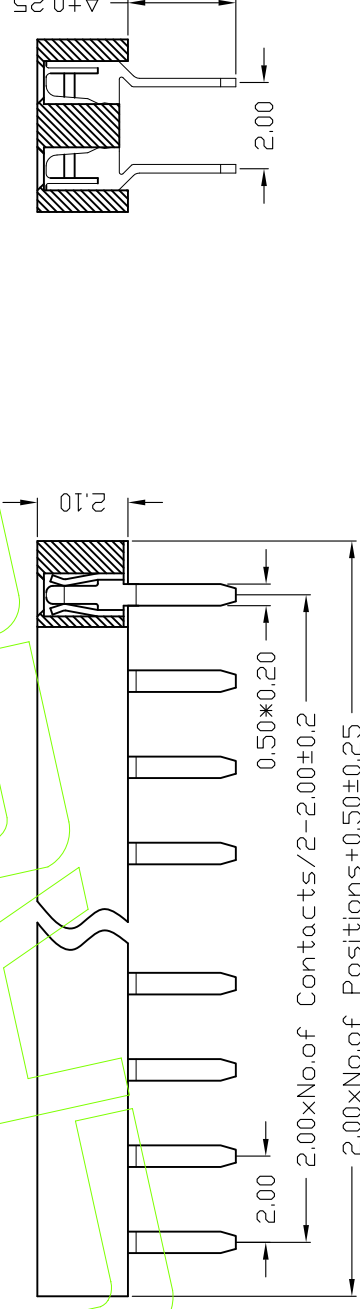
Operation Temperature: -40°C to 105°C

operation temperature: 400 °C

Ordering Information

2F21S-21 XX XX X U X 1 Δ_{A1} 

Recommended P.C.B layout



DIM"A"	1.60	2.50
--------	------	------

[illegible]