

HSF RoHS

1. 材料(MATERIAL)

端子：磷銅

2. 特性 (characteristics):

额定电压: 1 AMV
Rating Current: 1 AMP

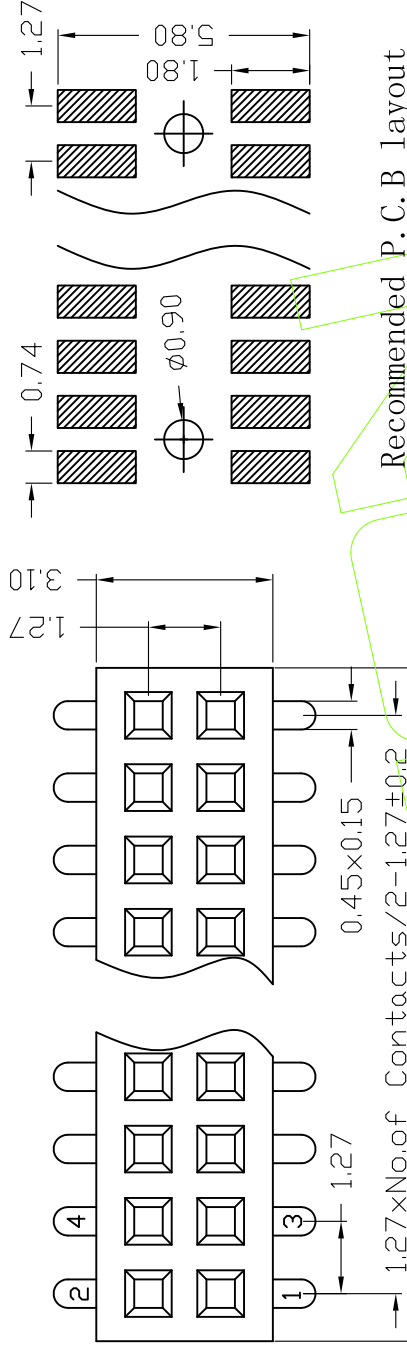
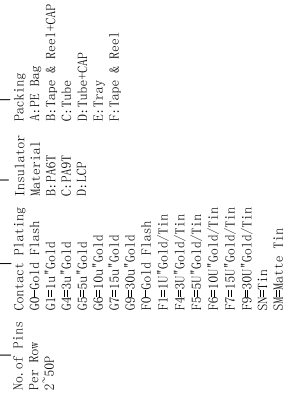
接觸電阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

Insulating Resistance: 100 MΩ MIN.

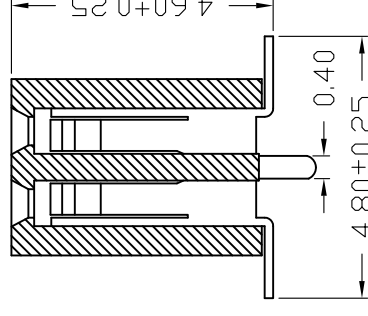
耐电压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

Ordering Information

1F43M-21 XX XX X U X 2 Δ_{A1} 

Recommended P.C.B layout

 $1.27 \times \text{No. of Positions} - 2.54 \pm 0.2$ [illegible]