

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 黄铜/磷青铜

Contact : Brass/Phosphor bronze

2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

1F43Z- 11 XX XX X U X 1 Δ

No. of Pins	Contact Plating	Insulator	Packing
Pz: Row	G: Gold Flash	Material	A: PE Bag
1: 30P	G1=10" Gold	D: PA6T	B: Tape & Reel+CAP
	G2=30" Gold	C: PA6T	C: Tube
	G3=50" Gold	D: LCP	D: Tube+CAP
	G4=100" Gold		E: Tray
	G5=150" Gold		F: Tape & Reel
	G6=300" Gold		
	P0=Gold Flash		
	F1=10" Gold/Tin		
	F2=30" Gold/Tin		
	F3=50" Gold/Tin		
	F4=100" Gold/Tin		
	F5=150" Gold/Tin		
	F6=300" Gold/Tin		
	SN=Tin		
	SM=Matte Tin		

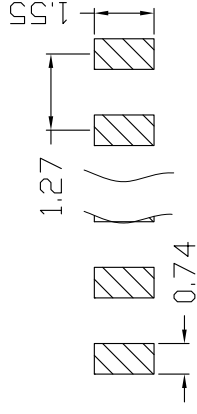

Recommended P.C.B layout

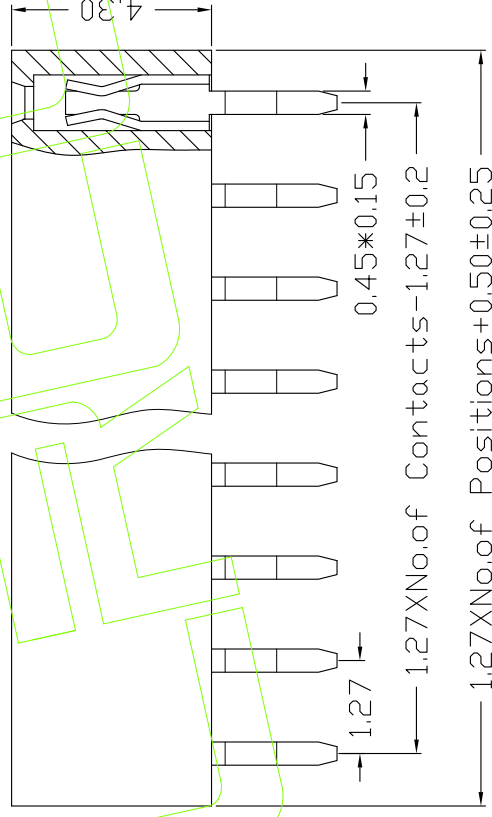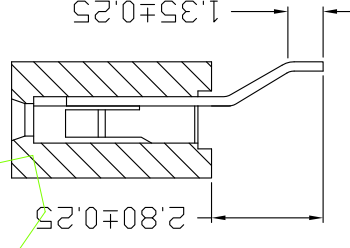

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION		DRAW	LI	ANR	20/06/09	SCALE		Fit	H	
							X.X	±0.40					UNIT	MM		DESIGN	DESIGN
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.XX	±0.25			DESIGN	张涛							
A0	12/05/18	NEW			X.XXX	±0.15			CHECK	罗荣军							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°			APPROVE	方里军							