

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜

Contact : Phosphor bronze

2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


Ordering Information

1F34S- 11 XX XX X U X 1 Δ

No. of Pins Pin Row 1 30P	Contact Plating G=Gold Flash G1=1u" Gold G2=3u" Gold G3=5u" Gold G4=10u" Gold G5=15u" Gold G6=30u" Gold F=10" Gold/Tin F1=30" Gold/Tin F2=50" Gold/Tin F3=100" Gold/Tin F4=150" Gold/Tin F5=300" Gold/Tin Sn=Sn Sn=Matte Tin	Insulator Material B: PA6T C: PA9T D: LCP	Packing A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel
---------------------------------	---	---	---

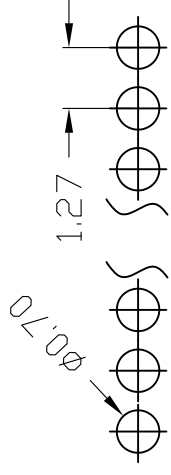

Recommended P.C.B layout

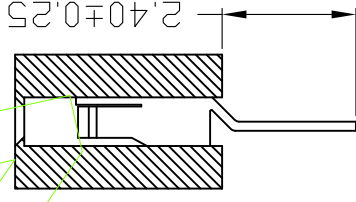

1.27
0.45x0.15
1.27xNo.of Contacts-1.27±0.2
1.27xNo.of Positions+0.40±0.25

LIRCON
连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO. 1F34S-11XXXXXU1
TITLE: 1.27单排母 塑高3.4 180度 U型
Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	OPERATION	DRAW	LI	ANR	20/06/09	SCALE		Fit	H			
													UNIT	MM		DESIGN	CHECK	APPROVE	Customer No.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	±0.40	DESIGN	张涛	DESIGN	张涛	张涛	张涛	A4	DESIGN	DESIGN	张涛	张涛	张涛	张涛
A0	12/05/18	NEW	—	—	X.XX	±0.25	CHECK	罗荣军	CHECK	罗荣军	罗荣军	罗荣军	1/1	CHECK	CHECK	罗荣军	罗荣军	罗荣军	罗荣军
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	OPERATION	DRAW	LI	ANR	20/06/09	UNIT	MM	Fit	DESIGN	CHECK	APPROVE	Customer No.