

HSF RoHS

Specifications

备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色,
Housing: PA6T+30%G.F UL94V-0, Color: Black

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω min

Insulating Resistance: 1000 M Ω min.

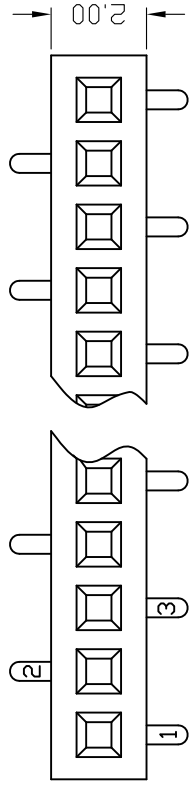
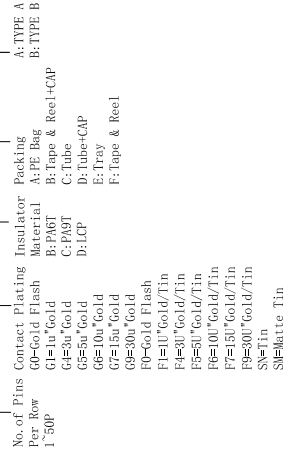
耐电压: AC 500V.

Withstanding voltage: AC 500V.
温度范围 -40°C ~ +105°C

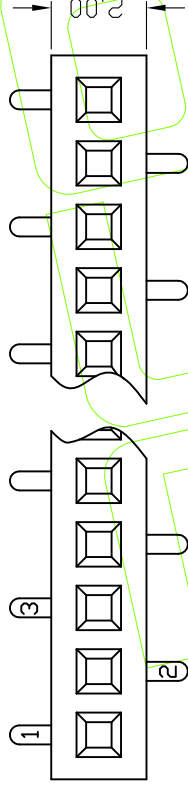
温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

temperature range: -40°C to +100°C

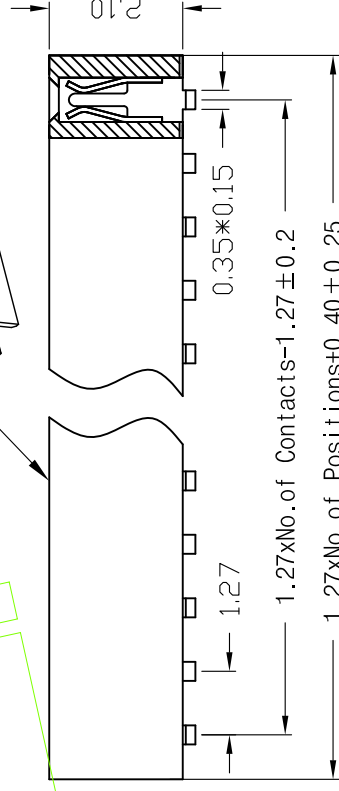
Ordering Information

1F21M-11 XX XX U X X Δ_{A1} 


TYPE A



TYPE B



Recommended P.C.B layout

[illegible]