

HSF RoHS

1. 材料(MATERIAL)

Housing: PA6T+30%G.F UL94V-0,Color:Black

Contact : Phosphor bronze

额定电流: 1 AMP

Rating current: 1 AML;
接觸阻抗: 20 mΩ MAX

CONDUCT RESISTANCE: 20 MΩ MAX.
边缘阻抗: 1000 MΩ min

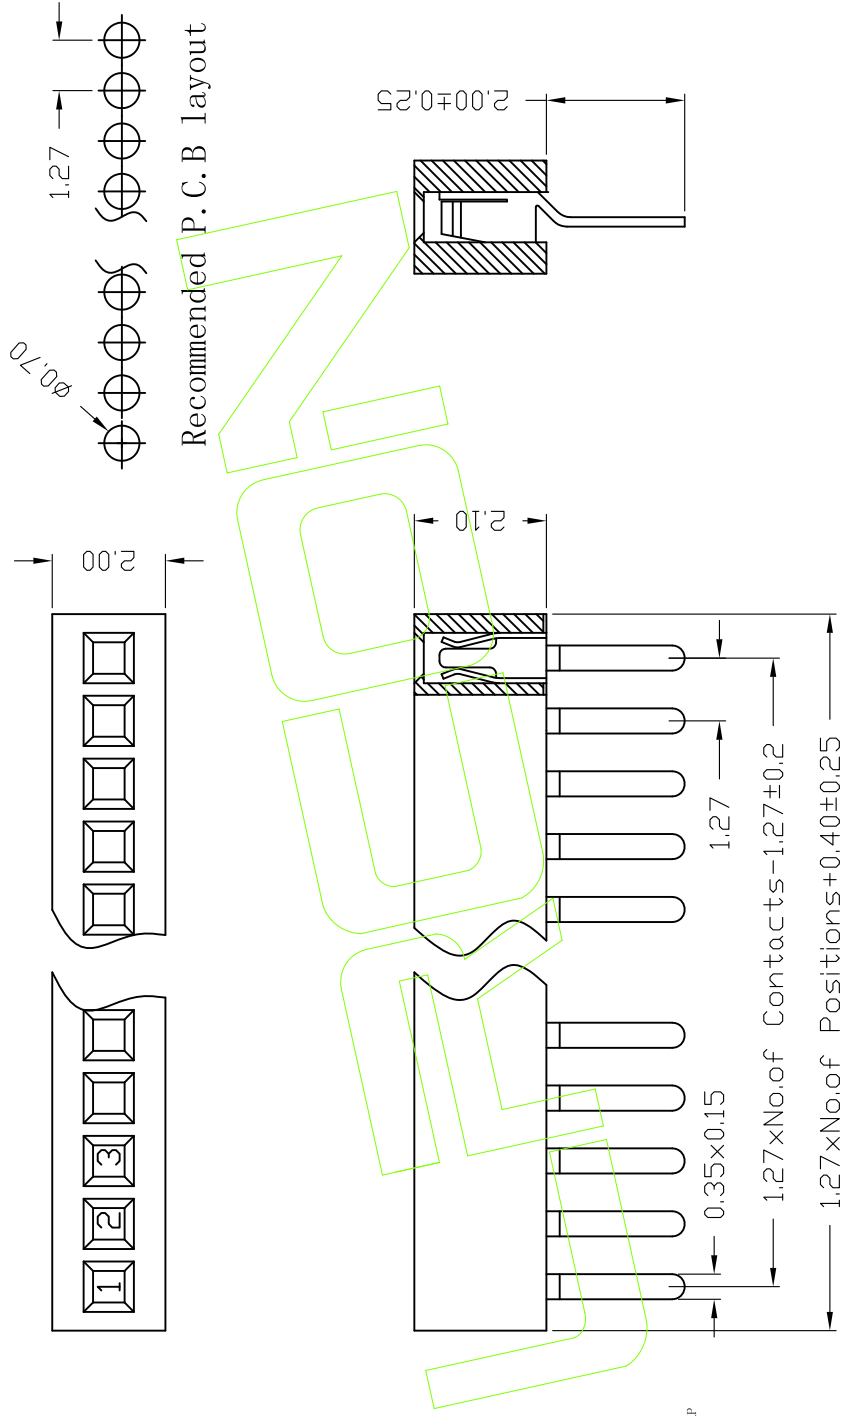
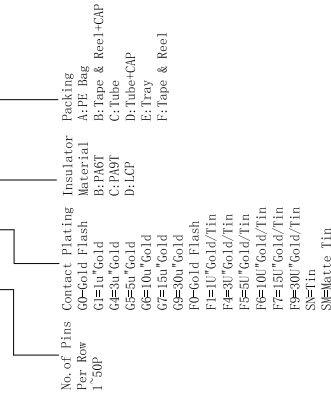
耐电压: AC 500V

Withstanding voltage: AC 500V.
温度范围: 40°C to 105°C

temperature range: -40 C to +105 C

Ordering Information

1F21S- 11 XX XX X U X 1 $\triangle_{A1}$

[illegible]