

# HSF RoHS Specifications

## 1. 材料(MATERIAL)

端子: 磷銅

## 2. 特性 (characteristics):

Rating Current: 1 AMP.

Contact Resistance: 20

Insulating Resistance: 100


Withstanding Voltage: AC 500V.

Temperature Range:  $-40^{\circ}\text{C}$ [illegible]


1F35H-21 XX XX X U X 1  $\triangle_{A1}$

1F35H-21 XX XX X U X 1  $\triangle_{A1}$ 

| No. of Pins<br>Per Row | Contact Plating | Insulator<br>Material | Packing                           |
|------------------------|-----------------|-----------------------|-----------------------------------|
| 2 500 <sup>a</sup>     | GO-gold Flash   | B: P66T               | A: PE Bag<br>B: Tape & Reel + CAP |
|                        | G=1U Gold       | C: P69T               | C: Tube                           |
|                        | G=3U Gold       | D: LCP                | D: Tube + CAP                     |
|                        | G=0U Gold       |                       | E: Tray                           |
|                        | G=15U Gold      |                       | F: Tape & Reel                    |
|                        | G=30U Gold      |                       |                                   |
|                        | FO-Gold Flash   |                       |                                   |
|                        | F=1U Gold/Tin   |                       |                                   |
|                        | F=3U Gold/Tin   |                       |                                   |
|                        | F=5U Gold/Tin   |                       |                                   |
|                        | F=0U Gold/Tin   |                       |                                   |
|                        | F=15U Gold/Tin  |                       |                                   |
|                        | F=30U Gold/Tin  |                       |                                   |
|                        | S=1U Tin        |                       |                                   |
|                        | S=3U Tin        |                       |                                   |
|                        | S=0U Tin        |                       |                                   |

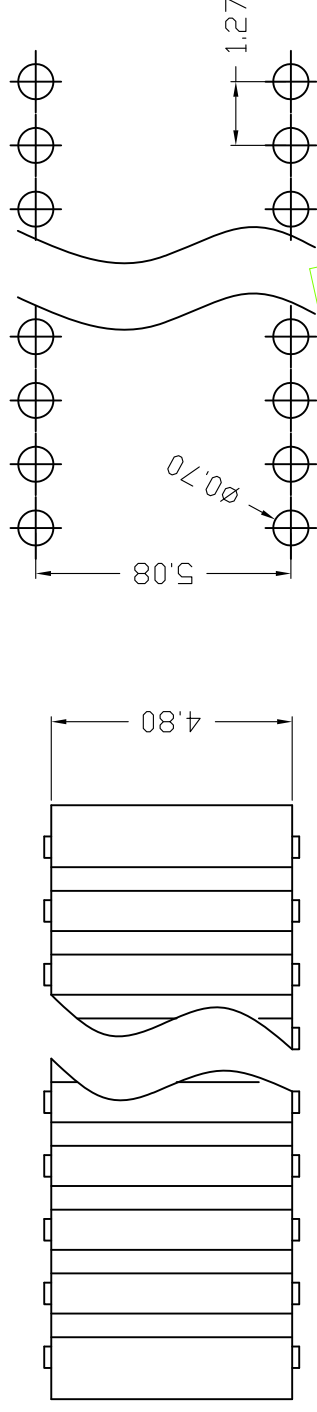

## Recommended P.C.B layout

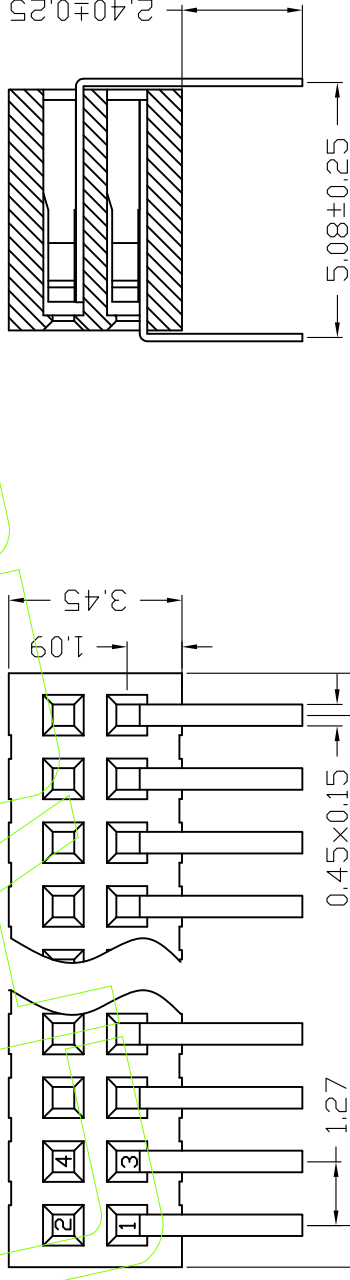[illegible]