



Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



Ordering Information

1F25H- 11 XX XX X U X 1 Δ

No. of Pins Pin Row 1 30P	Contact Plating G: Gold Flash G1=10" Gold G2=30" Gold G3=50" Gold G4=100" Gold G5=150" Gold G6=300" Gold F0=Gold Flash F1=10" Gold/Tin F2=30" Gold/Tin F3=50" Gold/Tin F4=100" Gold/Tin F5=150" Gold/Tin F6=300" Gold/Tin Sn= Tin Sn=Matte Tin	Insulator Material D: PA6T C: PA9T D: LCP	Insulator Material A: PE Bag B: Tape & Reel+CAP C: Tube D: Tube+CAP E: Tray F: Tape & Reel	Packing
---------------------------------	--	---	---	---------

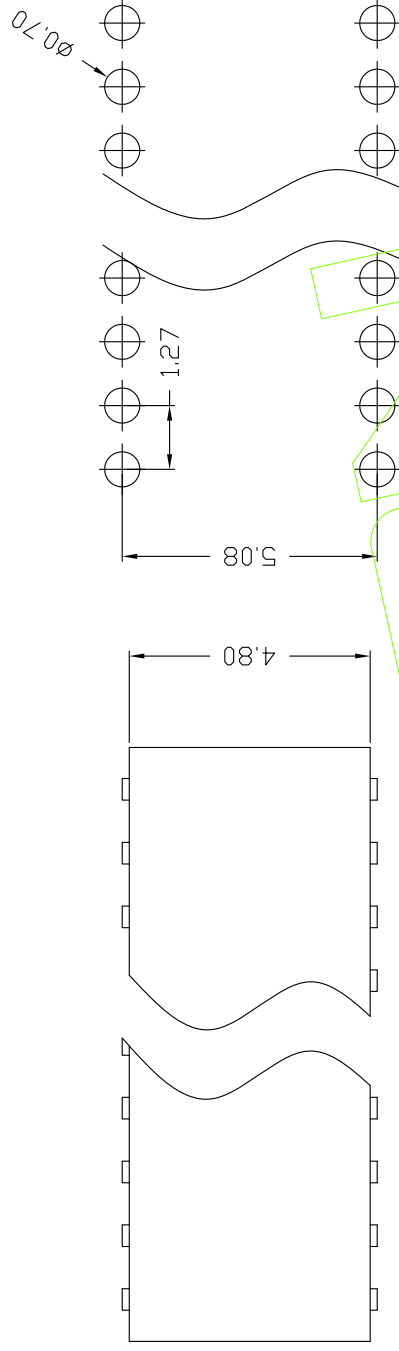

Recommended P. C. B layout

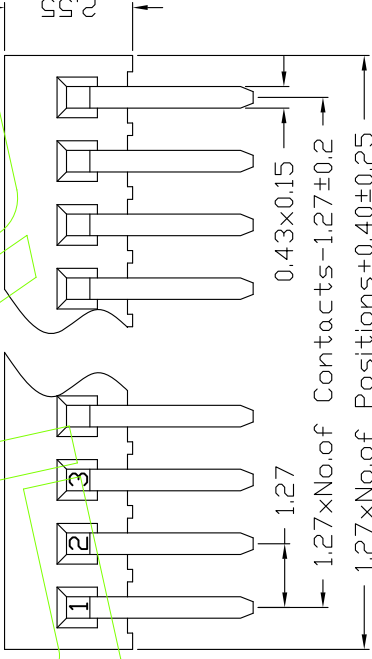

LARCON 连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	Angle	OPERATION		DRAW	LI	IANR	20/06/09	SCALE		Fit	H			
							X.X	±0.40					UNIT	MM		SIZE	SHEET	TITLE	Customer No.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	—	—	X.XX	±0.25	DESIGN	张涛	张涛		A4	DESIGN		1P25H-11XXXXXXU1			
A0	12/05/18	NEW	—	—	—	—	X.XXX	±0.15	CHECK	罗荣军	罗荣军		1/1	CHECK					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	Angle		±3°	APPROVE	方里军	方里军		PROJ.	APPROVE					