

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color:Black

端子: 磷銅

Contact : Phosphor bronze

2. 特性 (characteristics):

额定电流: 1.0 AMF

Rating Current: 1.0 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 M Ω min.

Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.



Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

Ordering Information

5F21Z- 11 XX XX X U X 1 Δ_{A1}

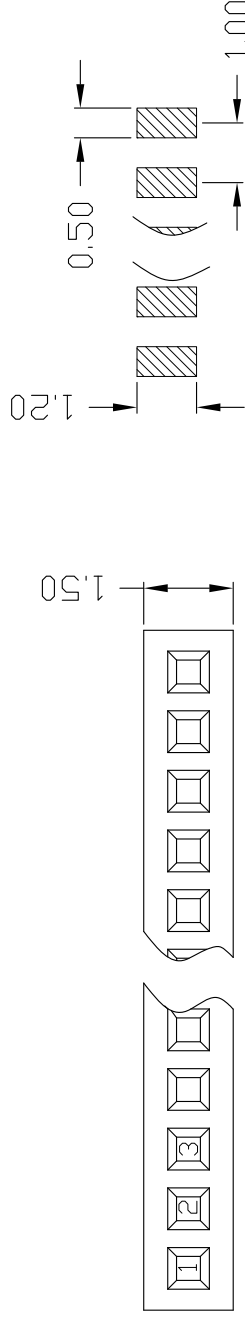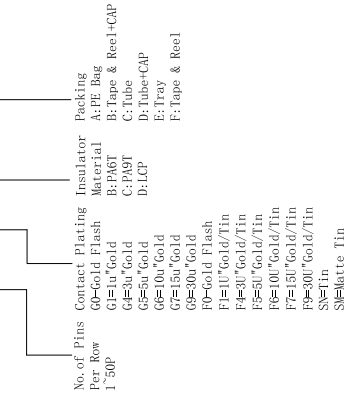

Recommended P.C.B layout

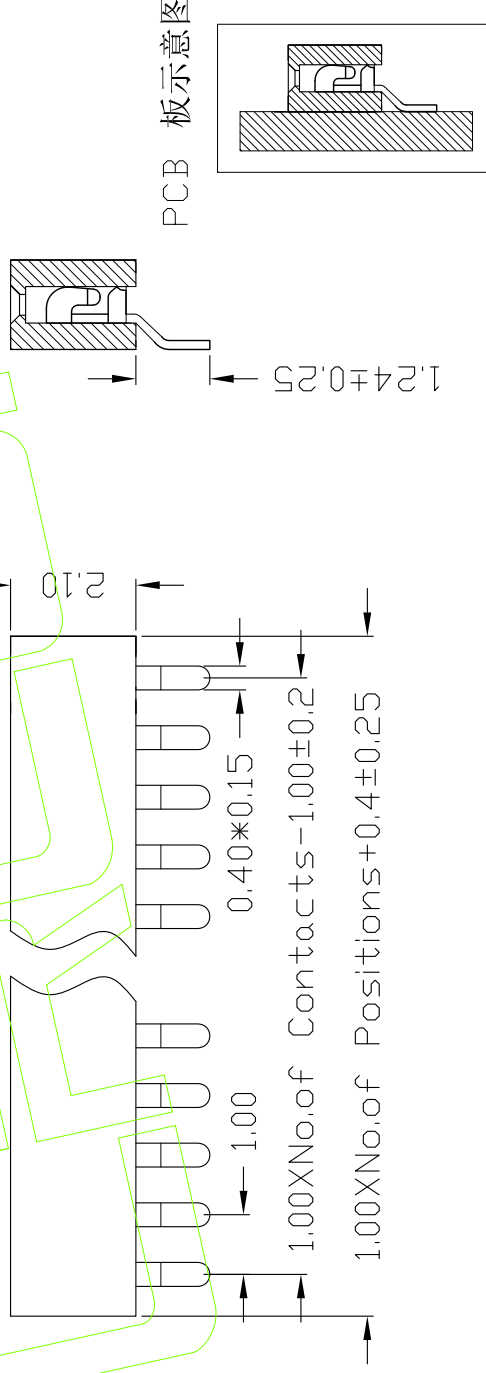[illegible]