

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-O, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-O, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.


Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

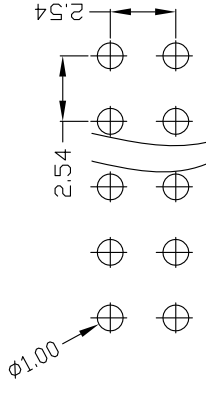


Recommended P.C.B layout

Ordering Information

3B90S- 1 XX XX X X X 1 Δ

No. of Pins	Contact Plating	Insulator Color	Packing
6 64P	G: Gold Flash	B: Black	A: PE Bag
	G=50 Gold	G: Grey	B: Tape & Reel+CAP
	G=50 Gold	W: White	C: Tube
	G=101 Gold	T: True color	D: Tube+CAP
	G=134 Gold		E: Tray
	G=500 Gold	D: LCP	F: Tape & Reel
Plating	Flash		
P0=Gold	Flash		
F1=10 Gold/Tin			
F4=30 Gold/Tin			
F5=50 Gold/Tin			
F6=100 Gold/Tin			
F7=150 Gold/Tin			
F9=300 Gold/Tin			
Sn=Sn			
Sh=Matte Tin			

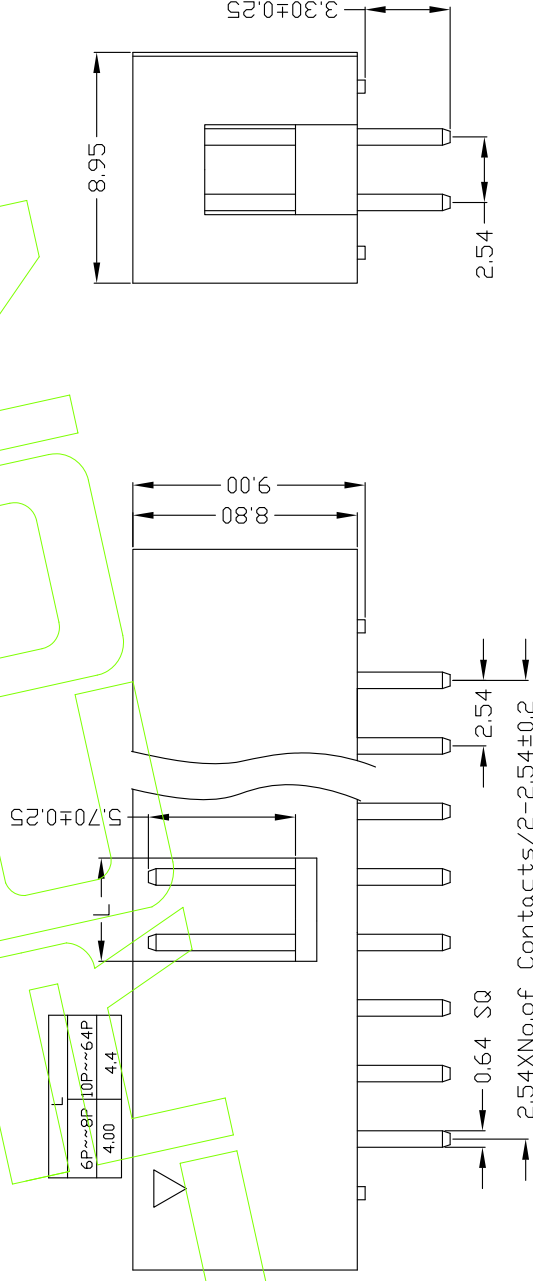

Lrcon 连润电子有限公司		Lrcon Electronics Co., Ltd	
20/06/09		20/06/09	
Improve numbering instructions (完善编号标注说明)		DESIGN	
NEW		CHECK	
12/05/18		APPROVE	
DATE		Customer No.	
MODIFICATION DESCRIPTION		3B90S-1XXXXXX1	
		2.54筒牛 塑高9.0 180度	