

HSF RoHS

1. 材料(MATERIAL)

- ## 1. 材料(MATERIAL)

Housing: PA6T/LCP30%GF UL94V-0.Color:Black

四方針・黃銅

2 特性 (characteristics)

额定电压: 2 AMV
Rating Current:

接触电阻: $20\text{ m}\Omega$ MAX.
Contact Resistance: $20\text{ m}\Omega$ MAX.




绝缘电阻: 1000 MΩ (1 min.)
Insulating Resistance: 1

Withstanding Voltage: AC 500V.

温度范围: -40°C 到 105°C
Temperature Range: -40°C

2B65M-1 XX XX XX XX

2B65M- 1 XX XX X X X 2 Δ_{A1}

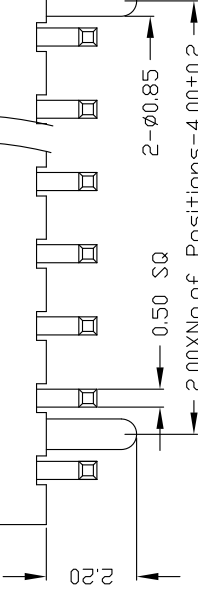

LARCON
连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve numbering instructions (完善编号标注说明)		张涛	X.XX	±0.25	CHECK	罗荣军	SIZE	A4	DESIGN	PART NO.	2B65M-1XXXXXX2
A0	12/05/18	NEW	—	—	X.XXX	±0.15	Angle	±3°	SHEET	1/1	CHECK	TITLE:	2.0莫仕筒牛 塑高6.4 SMT带柱 不带窗口
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	PROJ.		APPROVE	Customer No.	