

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.


Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

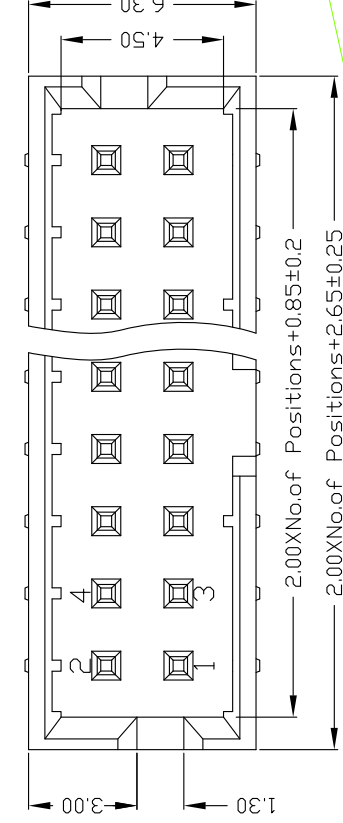


Recommended P.C.B layout



Ordering Information

2B65M- 1 XX XX X X X 1 Δ

No. of Pins	Contact Plating	Insulator	Color	Packing
6 68P	60-Gold Flash	BT401	B:Black	A: PE Bag
	64=50" Gold	C: PA6T		B: Tape & Reel+CAP
	66=50" Gold	D: LCP		C: Tube
	67=150" Gold			D: Tube+CAP
	68=500" Gold			E: Tray
	F0-Gold Flash			F: Tape & Reel
	F1=10"Gold/Tin			
	F4=30"Gold/Tin			
	F6=100"Gold/Tin			
	F7=150"Gold/Tin			
	F9=300"Gold/Tin			
	SW= Tin			
	SM= Matte Tin			

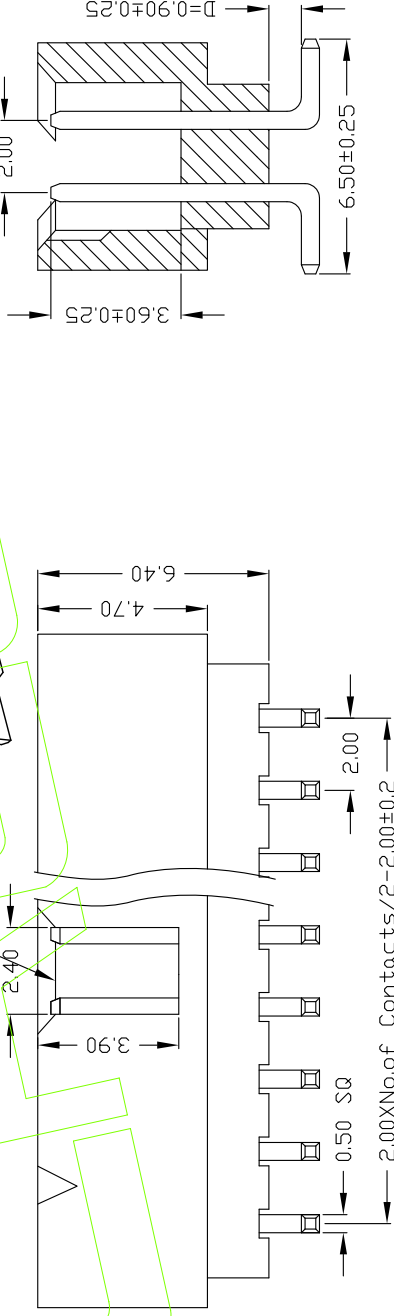

A1	20/06/09	Improve numbering instructions (完善编号注释说明)	△ ₁₁	张涛	X.XX	±0.25			SIZE	A4	DESIGN	PART NO.	2B65M-1XXXXXX1
A0	12/05/18	NEW	——	——	X.XXX	±0.15	CHECK	罗荣军	SHEET	1/1	CHECK	TITLE:	2.0莫仕筒牛 塑高6.4 SMT 不带窗口
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	方里军	PROJ.		APPROVE	Customer No.	