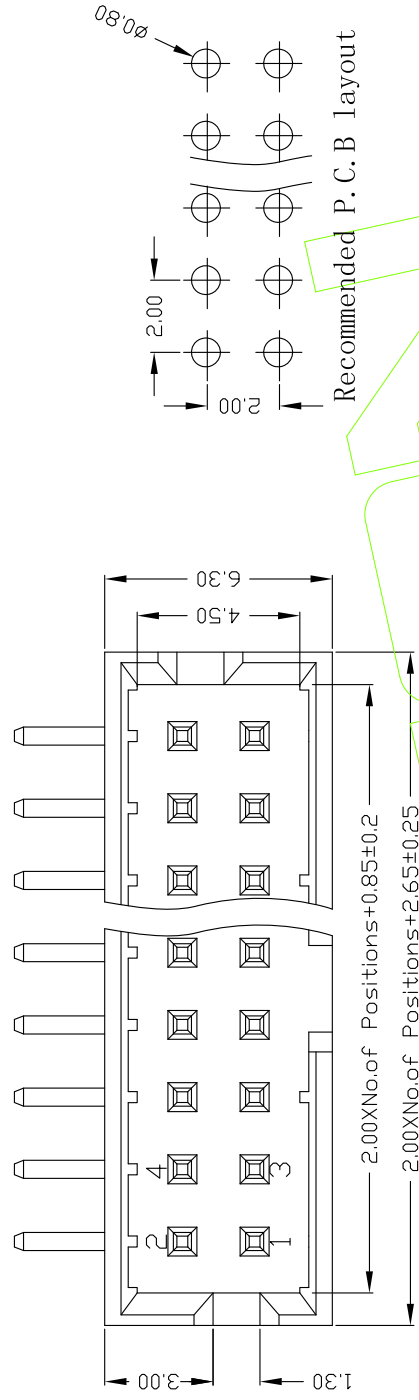


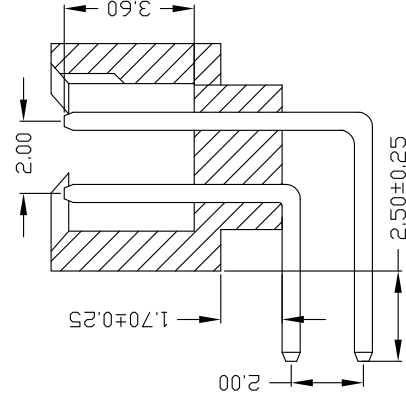
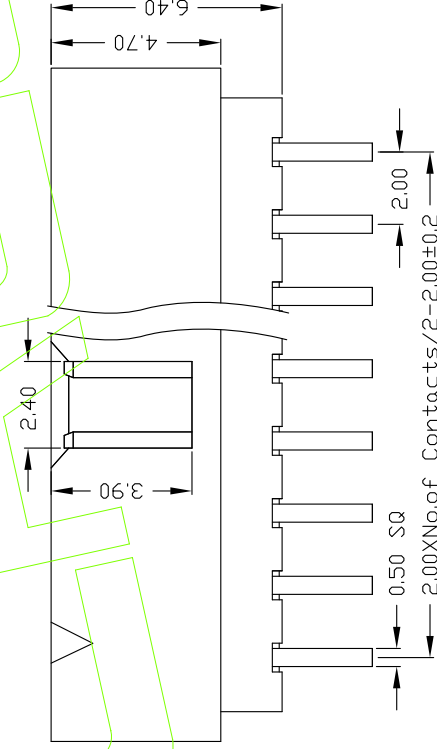
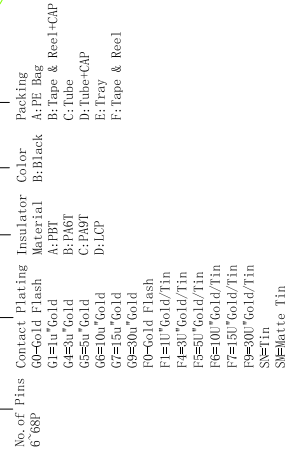
HSF RoHS

Specifications

备注(Remark)
 1. 材料(MATERIAL)
 胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black
 四方针: 黄铜
 Contact: Brass
 2. 特性 (Characteristics):
 额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ min.
 Insulating Resistance: 1000 MΩ min.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C



Ordering Information

2B65R-1 XX XX XX X 1 $\triangle_{A1}$ [illegible]