

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.


Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C


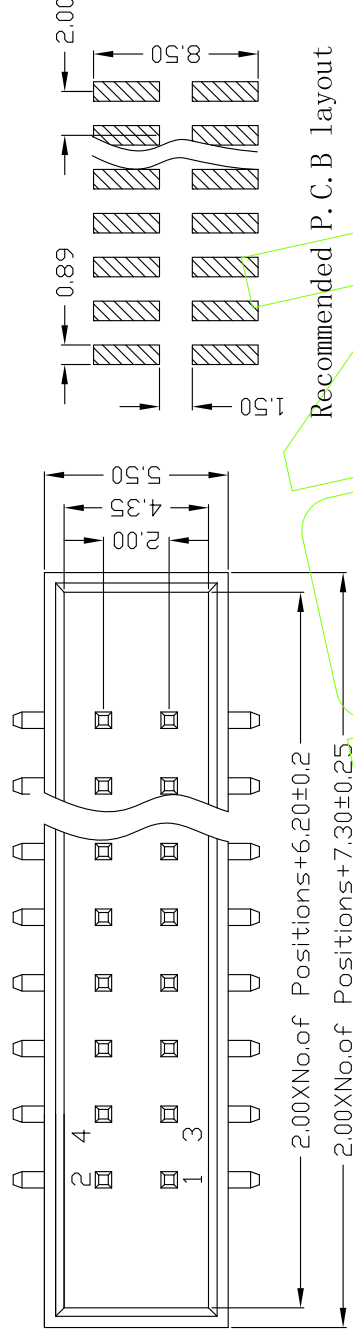


Recommended P.C.B layout

Ordering Information

2B57M- 1 XX XX X X X 3 Δ

No. of Pins	Contact Plating	Insulator Material	Color	Packing
6'8SP	GP=Gold Flash	A: PE Bag	B: Black	A: PE Bag
	GI=10"Gold	B: P601		B: Tape & Reel+CAP
	GS=50"Gold	C: P601		C: Tube
	GS=50"Gold	D: LCP		D: Tube+CAP
	GS=100"Gold			E: Tray
	GS=150"Gold			F: Tape & Reel
	GS=500"Gold			
	TP=Gold Flash			
	F1=10"Gold/Tin			
	F2=50"Gold/Tin			
	F3=50"Gold/Tin			
	F6=100"Gold/Tin			
	F7=150"Gold/Tin			
	F9=300"Gold/Tin			
	SN=Tin			
	SW=White Tin			

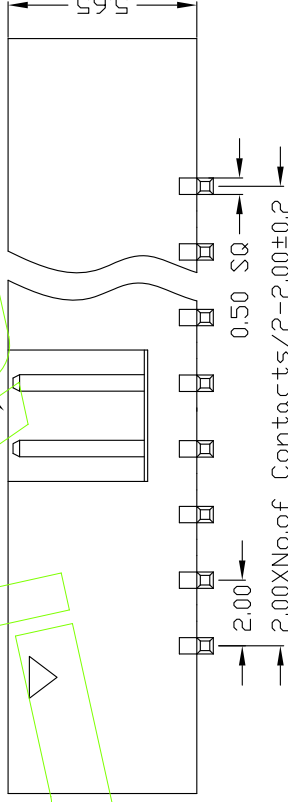

		LRCON		连润电子有限公司		Lrcon Electronics Co., Ltd	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	MM	PART NO.	2B57M-1XXXXXX3
A0	12/05/18	NEW	张涛	CHECK	1/1	TITLE:	2.0筒牛 塑高5.65 SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	Customer No.	