

HSF RoHS

1. 材料(MATERIAL)

- 胶芯: PA6T+30%GF UL94V-0, 颜色: 黑色;

四方针：黄铜

Contact: Brass

2.特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 M Ω min.



Insulating Resistance: 10

耐电压: AC 500V.


Withstanding voltage: AC
温度范围: 40°C to $+105^{\circ}\text{C}$

温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

2B57M-1 XX XX XX X X X 1 Δ_{A1}

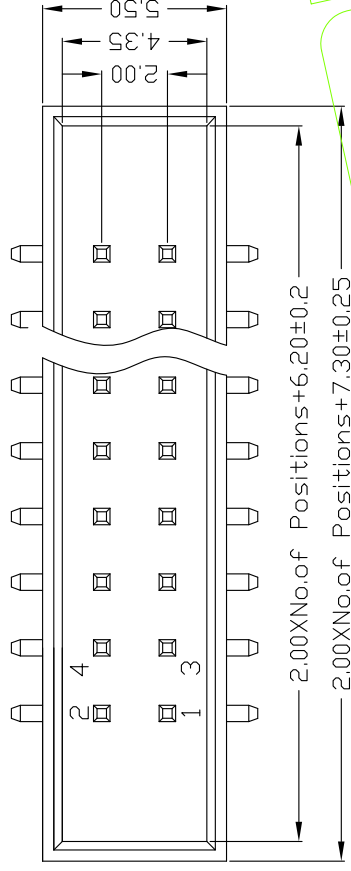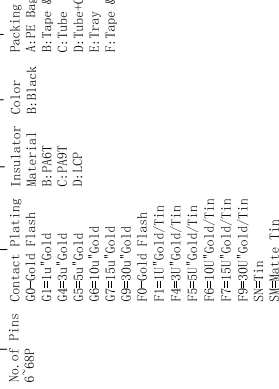

~~Recommended P.C.B layout~~

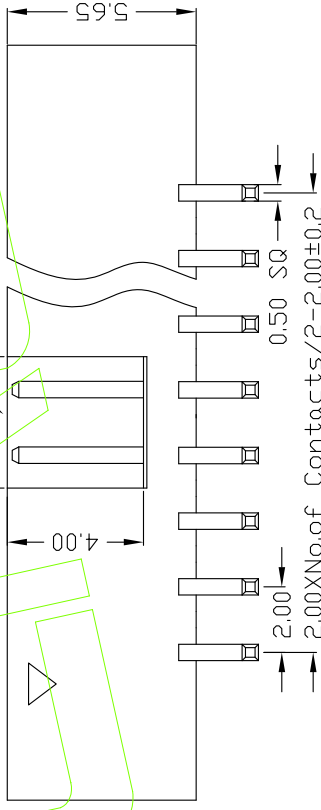

ITEM	D	
Standard	0	1.00
Alternate		

LARCON 连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve numbering instructions (完善编号注释说明)	$\triangle_{\Delta}$	张涛	X.XX ±0.25	CHECK	罗荣军	SIZE A4	DESIGN	PART NO.	2B57M-1XXXXXX1
A0	12/05/18	NEW	——	——	X.XXX ±0.15 Angle ±3°	APPROVE	方里军	SHEET 1/1	CHECK	TITLE:	2.0筒牛 塑高5.65 SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE	Customer No.	PROJ.	APPROVE	Customer No.	