

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接觸阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.
Contact Resistance: 20

绝缘阻抗: 1000 MΩ min.

绝缘电阻: 1000 M Ω min.
Insulating Resistance: 1000 M Ω min.

耐电压: AC 500V.

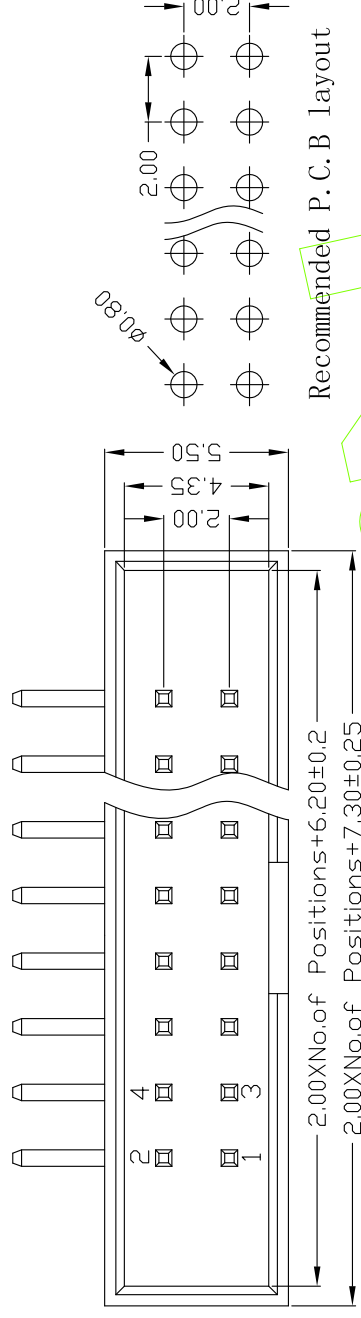
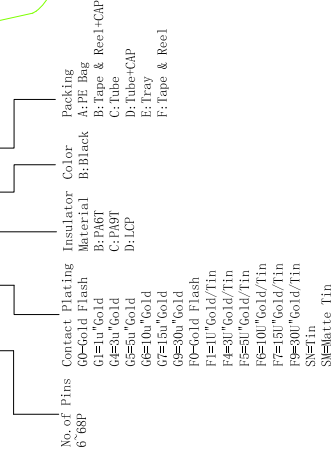
耐电压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

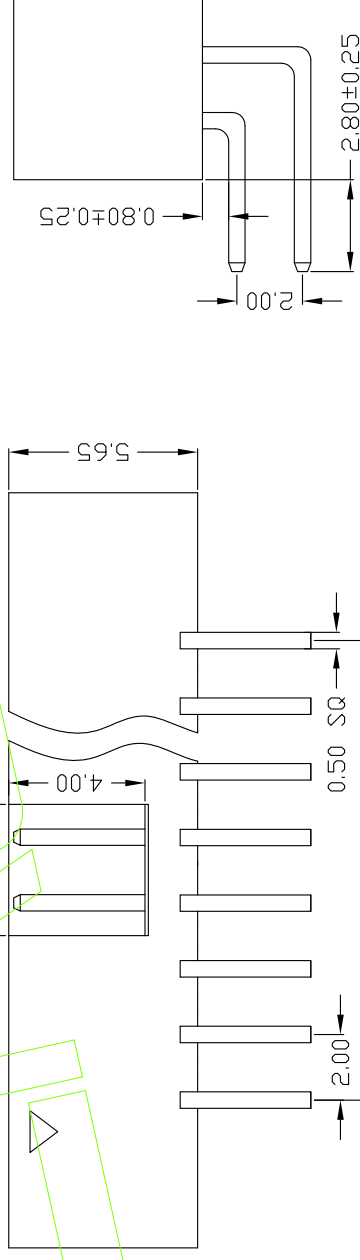
温度范围: -40°C to $+105^{\circ}\text{C}$
Temperature Range: -40°C to $+105^{\circ}\text{C}$

temperature range: -70°C to 100°C

Ordering Information

2B57R-1 XX XX X X 1 Δ_{H} 

Recommended P.C.B layout

[illegible]