

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接觸阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ max.

绝缘阻抗: 1000 MΩ min.

Insulating Resistor

耐电压: AC 500V.

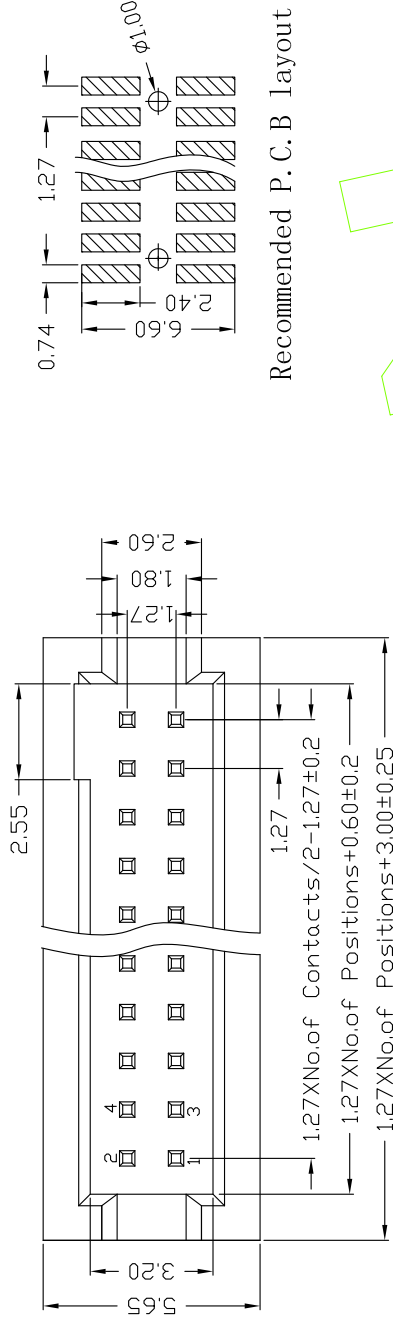
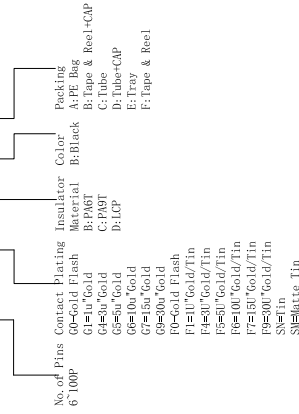
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

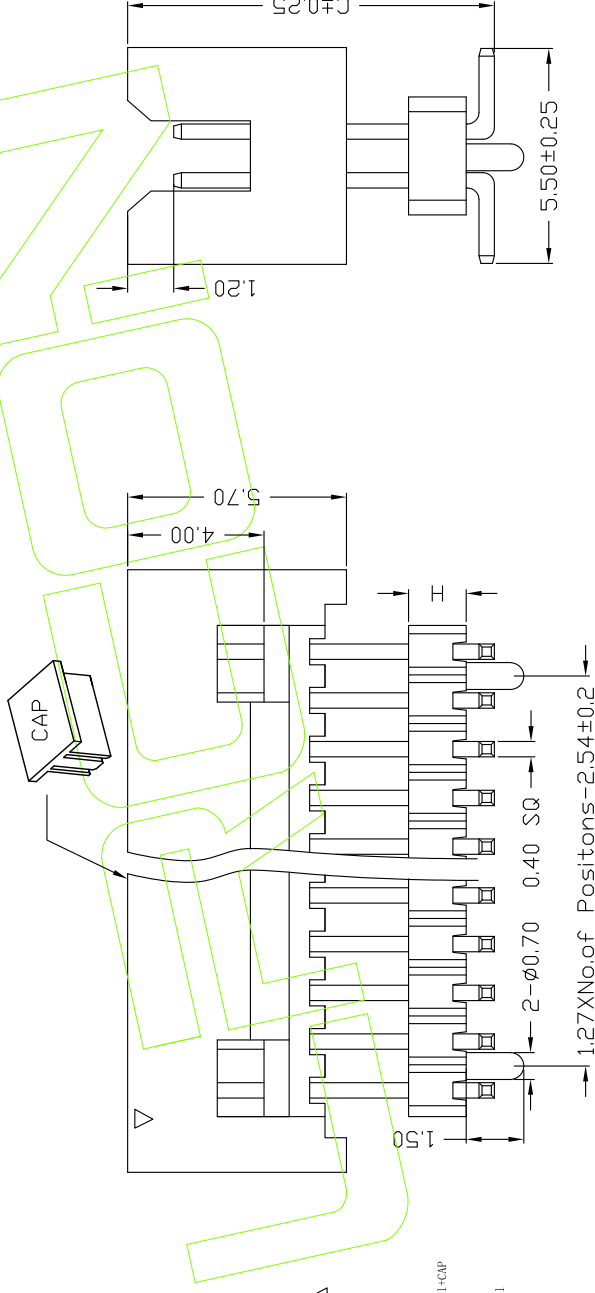
Temperature Range: -40°C to +105°C

0
0
0
4
-
2
0
2
+
0
-
-
-
+

Ordering Information

1B57M-2 XXX XX X X X 2 Δ_{A1} 

Recommended P. C. B layout



Users can customize
此高度可定制

ITEM	C	H
Standard	7.28,21.0	1.51,6.2,0.254
Alternate		

[illegible]