

Specifications


备注(Remark)

- 材料(MATERIAL)
胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black
四方针: 黄铜
- 特性 (Characteristics):
额定电流: 1 AMP
额定电压: 1 AMP
接触电阻: 20 mΩ MAX.
接触电阻: 1000 MΩ min.
绝缘电阻: 1000 MΩ min.
耐压: AC 500V.
 withstand Voltage: AC 500V.
 温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C


Ordering Information

1B57M- 2 XXX XX X X X 1 Δ

No. of Pins	Contact Plating	Insulator	Color	Packing
6~100P	GP=Gold Flash	Material	B:Black	A:PE Bag
	G1=1u"Gold	B:PA6T		B:Tape & Reel+CAP
	G4=5u"Gold	C:PA6T		C:Tape
	G5=5u"Gold	D:LCP		D:Tape+CAP
	G6=10u"Gold			E:Tray
	G7=15u"Gold			F:Tape & Reel
	G8=30u"Gold			
	F0=Gold Flash			
	F1=1u"Gold/Tin			
	F4=3u"Gold/Tin			
	F5=5u"Gold/Tin			
	F6=10u"Gold/Tin			
	F7=15u"Gold/Tin			
	F9=30u"Gold/Tin			
	SN=Tin			
	SW=Matte Tin			

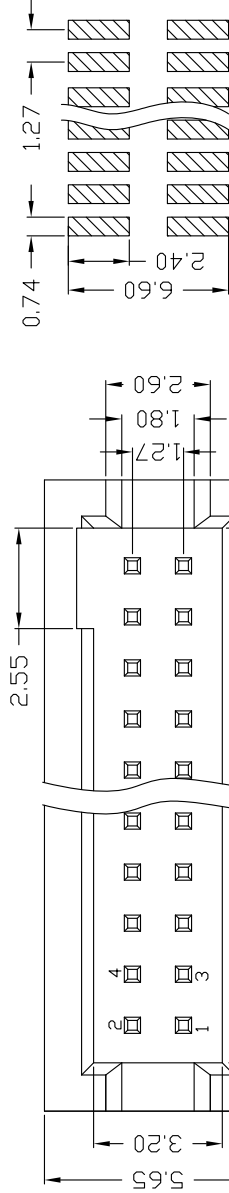

Recommended P. C. B layout

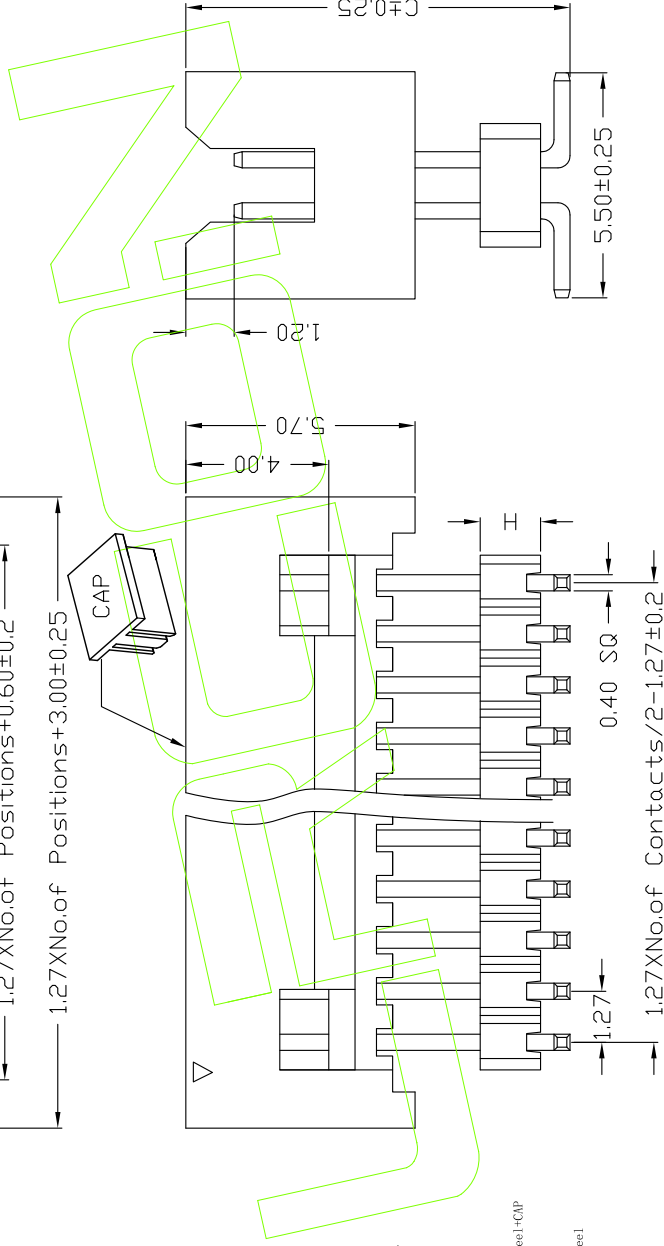

ITEM	C	H
Standard	7.28.21.01.51.62.02.54	
Alternate		

Lrcon		连润电子有限公司		Lrcon Electronics Co., Ltd	
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	张涛	DESIGN	MM
A0	12/05/18	NEW	罗荣军	CHECK	1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Customer No.
1	2	3	4	5	6
7	8	9	10		