

HSF RoHS

1. 材料(MATERIAL)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/LCP+30%G.F UL94V-0,Color: Black

四方针：黄铜

2. 特性 (characteristics)

Rating Current: 1 AMP

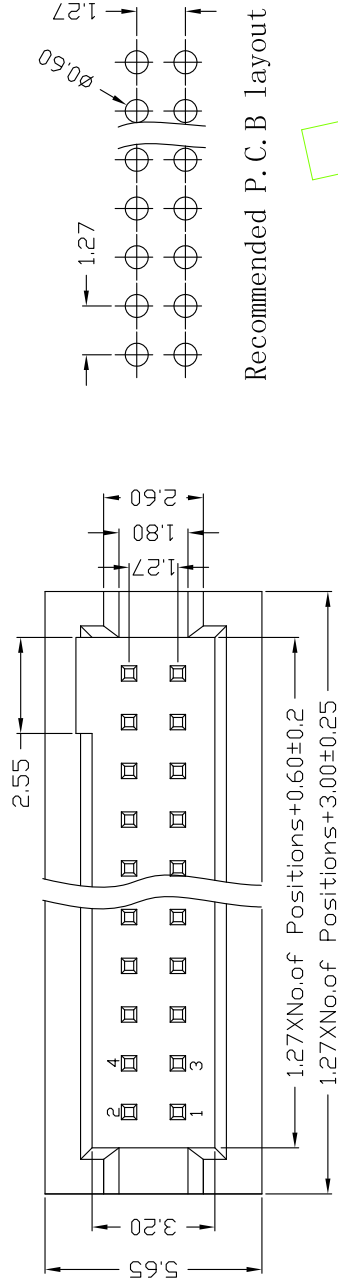
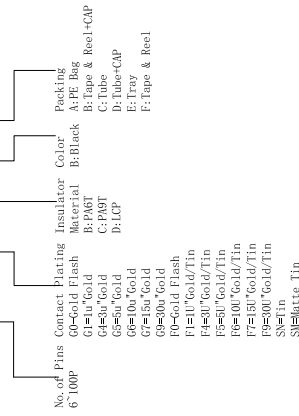
按触阻抗: 20 mV MAX.
Contact Resistance: 20

绝缘阻抗: 1000 MV min.
Insulating Resistance: 1000 MV

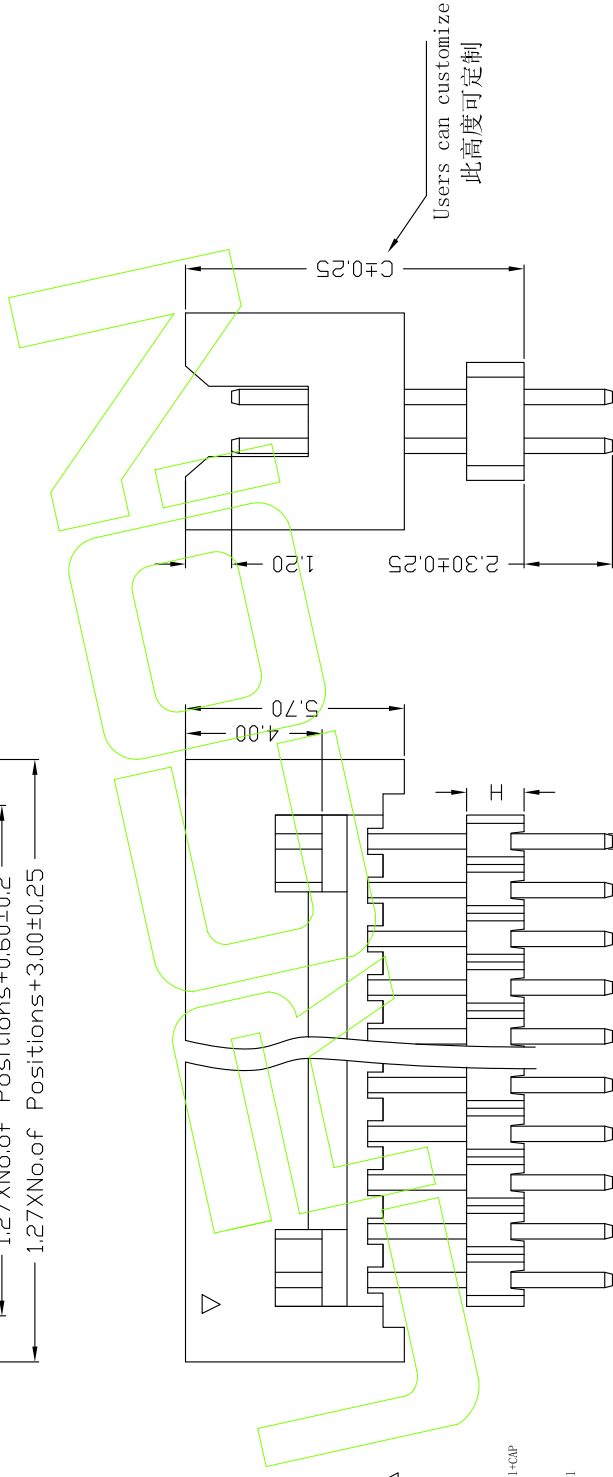
耐电压: AC 500V.
Withstanding Voltage: AC 500V

温度范围: -40°C to $+105^{\circ}\text{C}$

Ordering Information

1B57S-2 XXX XX X X X 1 Δ_{A1} 

Recommended P.C.B layout



Users can customize
此高度可定制

ITEM	C		H	
Standard	6.7	7.1	0.5	1.6
Alternate				

[illegible]