

## Specifications

## 备注(Remark)

## 1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA6T/LCP+30%G.F UL94V-0,Color:Black

## 四方针: 黄铜

## Contact:Brass

## 2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current:1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.


Insulating Resistance:1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

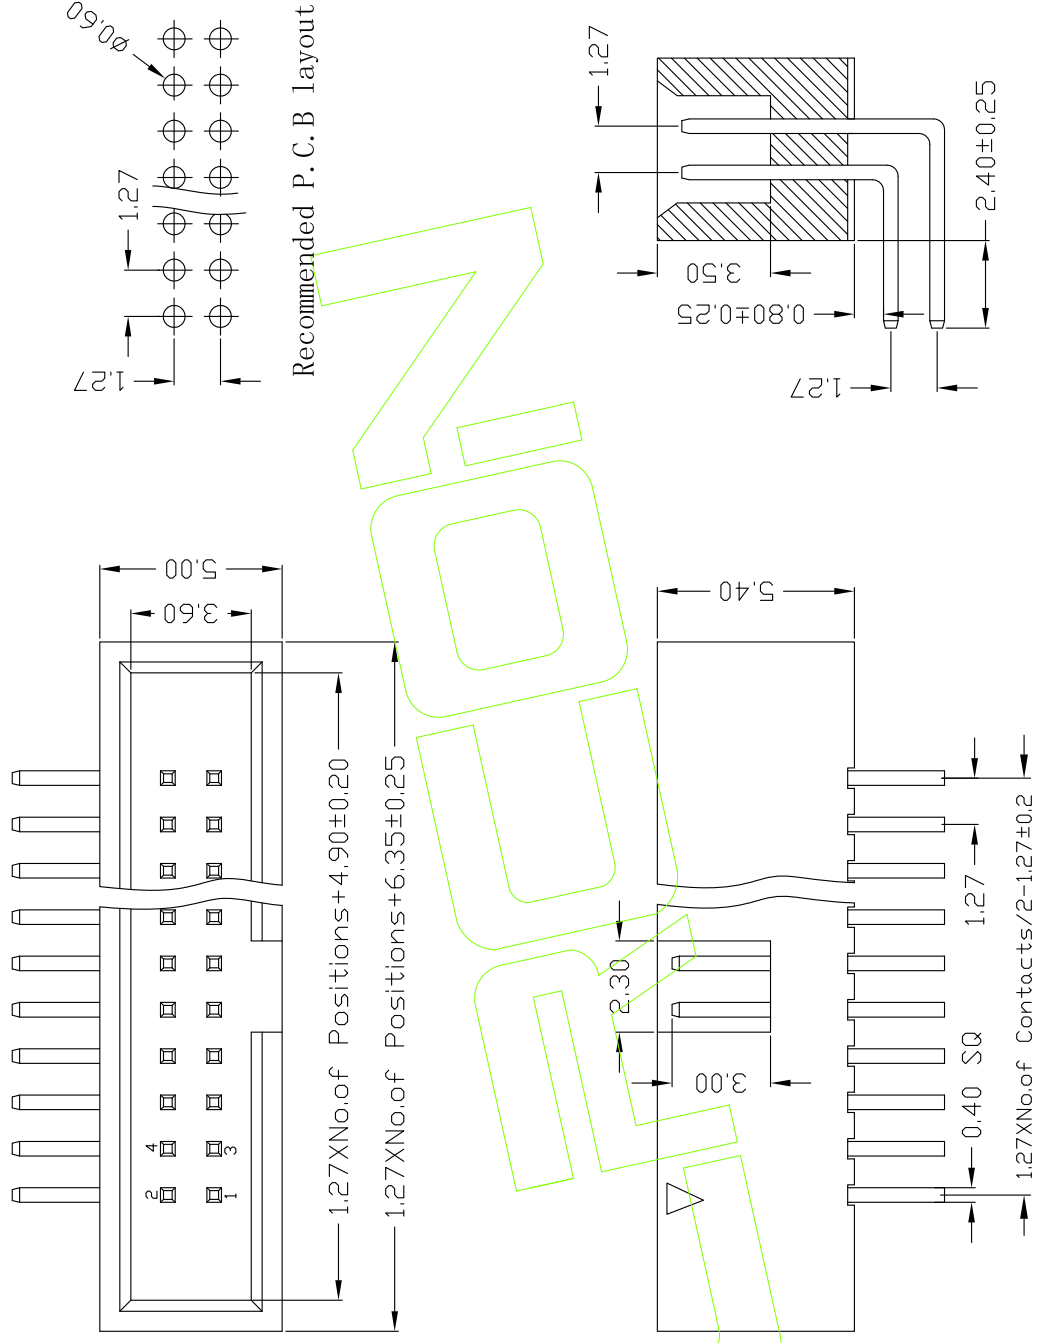

## Ordering Information

1B54R- 1 XXX XX X X X 1 Δ

| No. of Pins | Contact Plating | Insulator Color | Packing            |
|-------------|-----------------|-----------------|--------------------|
| 6 08P       | Gold Flash      | A: PE Bag       | A: PE Bag          |
|             | G=10" Gold      | B: PA6T         | B: Tape & Reel+CAP |
|             | G=50" Gold      | C: PA6T         | C: Tube            |
|             | G=50" Gold      | D: LCP          | D: Tube+CAP        |
|             | G=101" Gold     |                 | E: Tray            |
|             | G=151" Gold     |                 | F: Tape & Reel     |
|             | G=300" Gold     |                 |                    |
|             | Fl=Gold Flash   |                 |                    |
|             | F=10" Gold/Tin  |                 |                    |
|             | F=30" Gold/Tin  |                 |                    |
|             | F=50" Gold/Tin  |                 |                    |
|             | F=100" Gold/Tin |                 |                    |
|             | F=150" Gold/Tin |                 |                    |
|             | F=300" Gold/Tin |                 |                    |
|             | Sn=Sn           |                 |                    |
|             | Sh=Matte Tin    |                 |                    |

|       |  |          |                                           |                           |         |        |     |       |              |    |
|-------|--|----------|-------------------------------------------|---------------------------|---------|--------|-----|-------|--------------|----|
| Lrcon |  | 连润电子有限公司 |                                           | Lrcon Electronics Co.,Ltd |         |        |     |       |              |    |
| A1    |  | 20/06/09 | Improve numbering instructions (完善编号标注说明) | △                         | 张涛      | DESIGN | 张涛  | MM    | Fit          |    |
| A0    |  | 12/05/18 | NEW                                       | —                         | —       | CHECK  | 罗荣军 | 1/1   | CHECK        |    |
| REV   |  | DATE     | MODIFICATION DESCRIPTION                  | CHANGE                    | APPROVE | DIM    | TOL | PROJ. | Customer No. |    |
| 1     |  | 2        | 3                                         | 4                         | 5       | 6      | 7   | 8     | 9            | 10 |