

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触电阻: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.



温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C




Ordering Information

4B10S- 1 XX XX X X X X Δ

No. of Pins	Contact Plating	Insulator	Color	Packing
6 68P	GI=1u Gold	Material	B: Black	C: Tube
	G4=50u Gold	C: PA6T		E: Tray
	G6=50u Gold	C: PA9T		F: Tape
	G8=10u Gold	D: LCP		
	G7=15u Gold			
	G9=50u Gold			
	P0=gold Flash			
	F1=10" Gold/Tin			
	F4=30" Gold/Tin			
	F6=50" Gold/Tin			
	F8=100" Gold/Tin			
	F7=150" Gold/Tin			
	F9=300" Gold/Tin			
	SH= Tin			
	SL= Matte Tin			

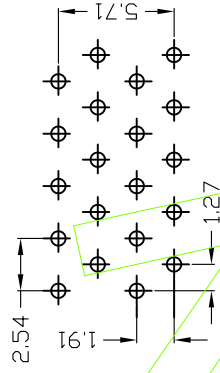

Recommended P.C.B layout

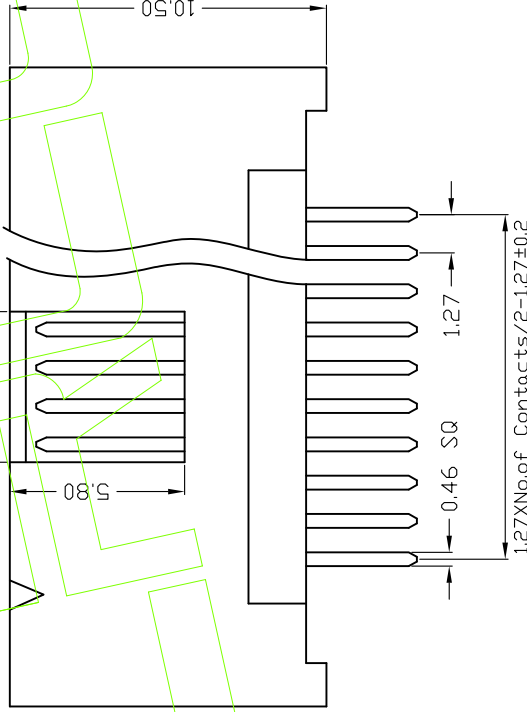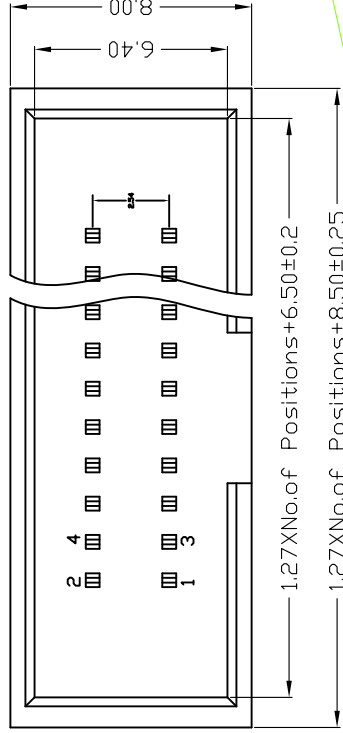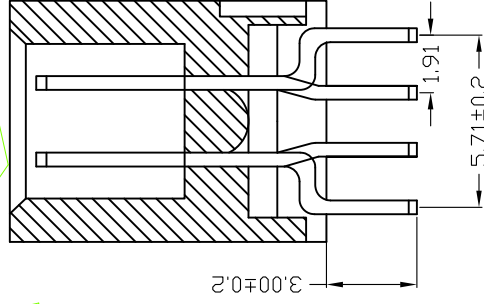

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	Angle	TOL	APPROVE	方里军	罗荣军	张涛	DESIGN	UNIT	Fit	SCALE	20/06/09	LI	ANR	20/06/09	SCALE	UNIT	Fit	MM	4B10S-1XXXXXX	PART NO.	TITLE:	Customer No.
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ	张涛	X.X	±0.40							A4	DESIGN			张涛	张涛		A4	DESIGN			4B10S-1XXXXXX			
A0	12/05/18	NEW			X.XX	±0.25							1/1	CHECK				罗荣军		1/1	CHECK			1.27*2.54筒牛 塑高10.5 180度			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	Angle	TOL	APPROVE	方里军	罗荣军	张涛	DESIGN	UNIT	Fit	SCALE	20/06/09	LI	ANR	20/06/09	SCALE	UNIT	Fit	MM	4B10S-1XXXXXX	PART NO.	TITLE:	Customer No.