

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 1 AMP

额定电流: 1 AMP.

接触电阻: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.

耐电压: AC 500V.

耐电压: AC 500V.


温度范围: -40°C to +105°C

温度范围: -40°C to +105°C


Ordering Information

4B96S- 1 XX XX X X X 1

No. of Pins 6 68P	Contact Plating G=Gold	Insulator Color Material B: Black	Packing C: Tube
	G=30" Gold	E: PA6T	E: Tray
	G=50" Gold	G: PA9T	F: Tape
	G=100" Gold	D: LCP	
	G=150" Gold		
	G=300" Gold		
	P=Gold Flash		
	F=10" Gold/Tin		
	F=30" Gold/Tin		
	F=50" Gold/Tin		
	F=100" Gold/Tin		
	F=150" Gold/Tin		
	F=300" Gold/Tin		
	Sn=Tin		
	Sh=Matte Tin		

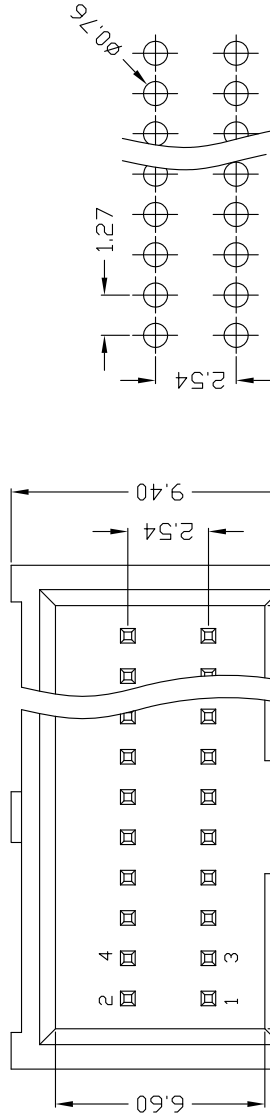

Recommended P.C.B layout

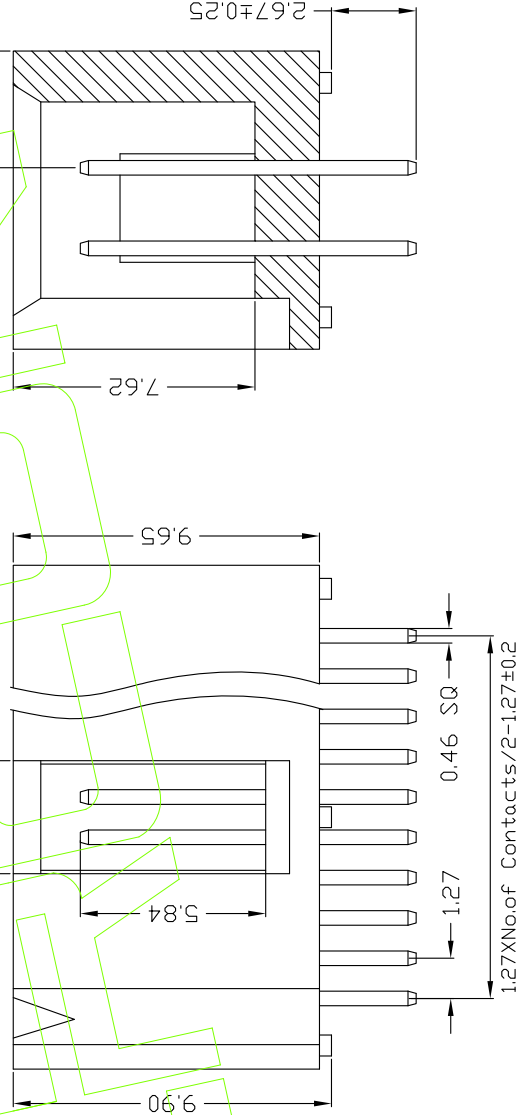Lrcon 连润电子有限公司
Lrcon Electronics Co., Ltd

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	DRAW	LI	ANR	20/06/09	SCALE		Fit	H
												UNIT	SIZE		
A1	20/06/09	Improve numbering instructions (完善编号标注说明)	△	张涛	X.X	±0.40	DESIGN	张涛	张涛	张涛	张涛	A4	DESIGN	MM	4B96S-1XXXXXX1
A0	12/05/18	NEW	—	—	X.XX	±0.25	CHECK	罗荣军	罗荣军	罗荣军	罗荣军	1/1	CHECK		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	DRAW	LI	ANR	20/06/09	UNIT	SIZE	CHECK	TITLE:
															1.27*2.54 筒牛 塑高9.65 180度
															Customer No.