

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-O, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-O, Color: Black

四方针: 黄铜

Contact: Brass

2. 特性 (Characteristics):

额定电流: 3 AMP

额定电压: 3 AMP

接触电阻: 20 mΩ MAX.

绝缘电阻: 1000 MΩ min.

绝缘耐压: 1000 V AC min.

耐电压: AC 500V.

温度范围: -40°C to +105°C

温度范围: -40°C to +105°C

Ordering Information


3EXXS- 2 XX XX X X X 1

No. of Pins
6 64P

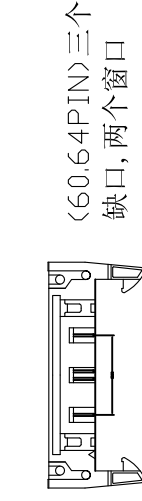
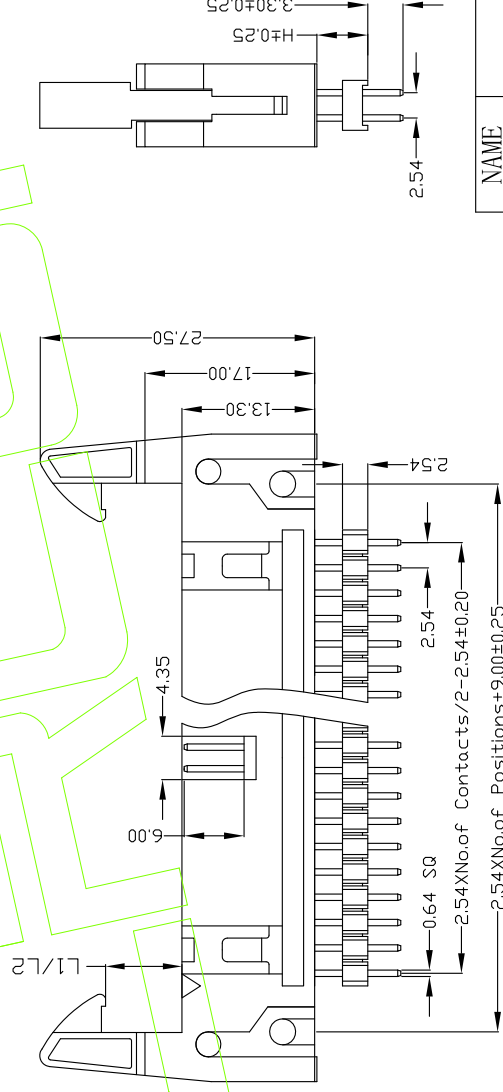
Contact Plating
G=Gold Flash
G=1u Gold
G=5u Gold
G=50 Gold
G=10u Gold
G=15u Gold
G=30u Gold
F=10" Gold/Tin
F=30" Gold/Tin
F=50" Gold/Tin
F=100" Gold/Tin
F=150" Gold/Tin
F=300" Gold/Tin
S=Fin
SH=Matte Tin

Insulator Color
A: PE Bag
B: Tape & Reel+CAP
C: PA6T
D: PA6T
E: PA6T

Packing
A: PE Bag
B: Tape & Reel+CAP
C: PA6T
D: PA6T
E: PA6T



Recommended P.C.B layout

<60.64PIN>三个
缺口, 两个窗口<20.24.26.30
34.40.50PIN>
一个缺口, 两个窗
口<10 14 16PIN>一
个缺口

NAME	PARTNO	H
Long Latch	3E01S-2XXXXXXX1	2.54
Short Latch	3E02S-2XXXXXXX1	2.54

LRCON
连润电子有限公司
Lrcon Electronics Co., Ltd

PART NO.	3EXXS-2XXXXXX1
TITLE:	2.54牛角 180度 加塑胶 (2.54)
Customer No.	

REV	DATE	MODIFICATION DESCRIPTION	1	2	3	4	5	6	7	8	9	10
A1	20/06/09	Improve number ing Instructions (完善编号标注说明)										
A0	12/05/18	NEW										
REV	DATE	MODIFICATION DESCRIPTION	1	2	3	4	5	6	7	8	9	10