

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色;

Housing: PA6T/PBT+30%G.F UL94V-0,Color:Black

四方针：黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

接触电阻: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ min.

绝缘电阻: 1000 MΩ min.
Insulating Resistance: 1000 MΩ min.

耐电压: AC 500V.

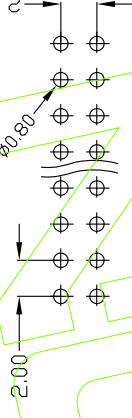
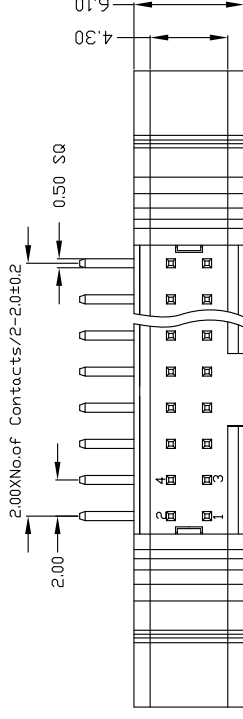
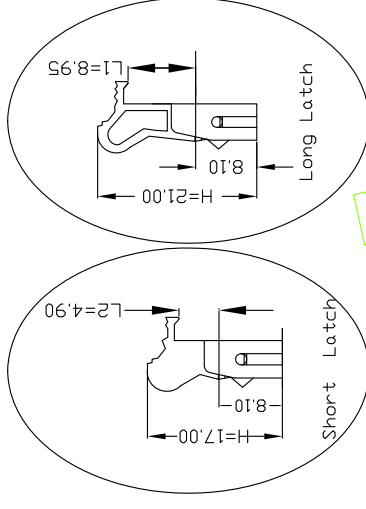
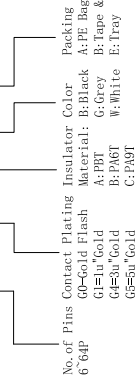
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

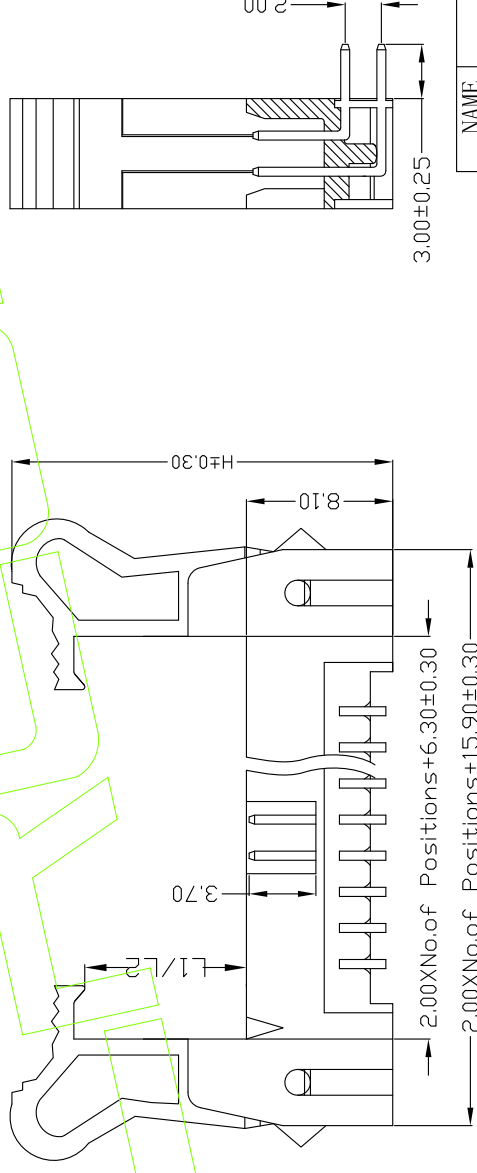
Temperature Range: -40°C to $+105^{\circ}\text{C}$

temperature range: 40 to 120 °C

Ordering Information

2EXPR-1 XX XX X X 1 Δ_{A1} 

Recommended P.C.B. layout



NAME	PART NO
Long Latch	2E01R-1XXXXXXX1
Short Latch	2E02R-1XXXXXXX1

LRCON
连润电子有限公司
Lrcon Electronics Co., Ltd.

[illegible]