

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: LCP/PA6T+30%G.F UL94V-0, 颜色: 黑色;

Housing: LCP/PA6T+30%G.F UL94V-0, Color: Black

四方针：黄铜

Contact: Brass

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接觸阻抗: 20 mΩ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 M Ω min.

Insulating Resistor

耐电压: AC 500V.

耐电压: AC 500V.
Withstanding Voltage: AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$



Temperature Range: -40°C

Temperature range: 40 °C to 100 °C

Ordering Information

1E02M-1 XXX XX X X 2 Δ_{AT}

No. of Pins	Contact Plating	Insulator	Color	Packing
6~68P	GO-Gold Flash	Material:	B: Black	A: PE Bag
	G1=1u"Gold		B: PA6T	B: Tape & Reel+CAP
	G4=3u"Gold		C: PA9T	E: Tray
	G5=5u"Gold		D: LCP	

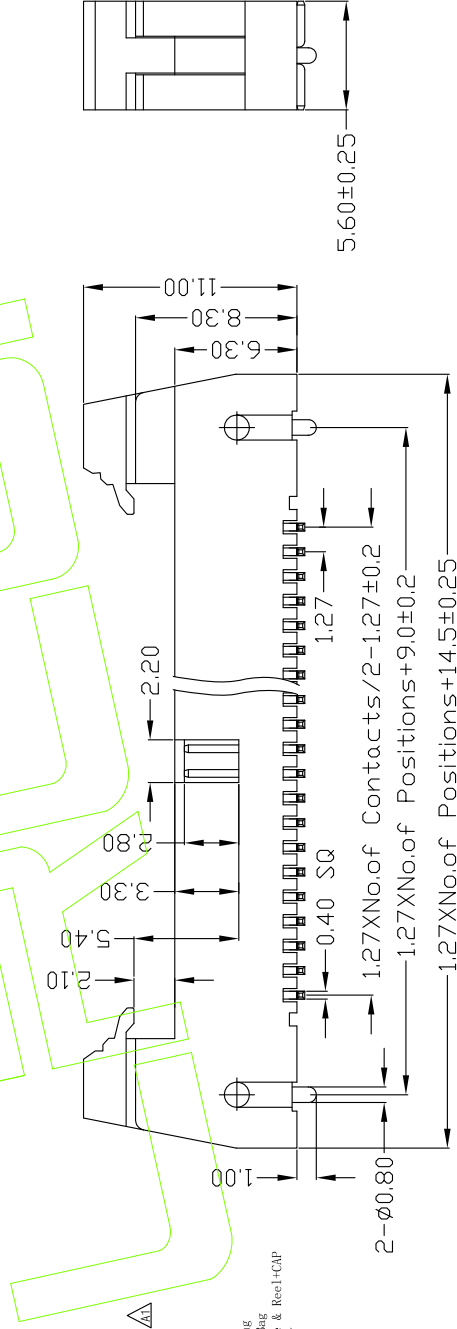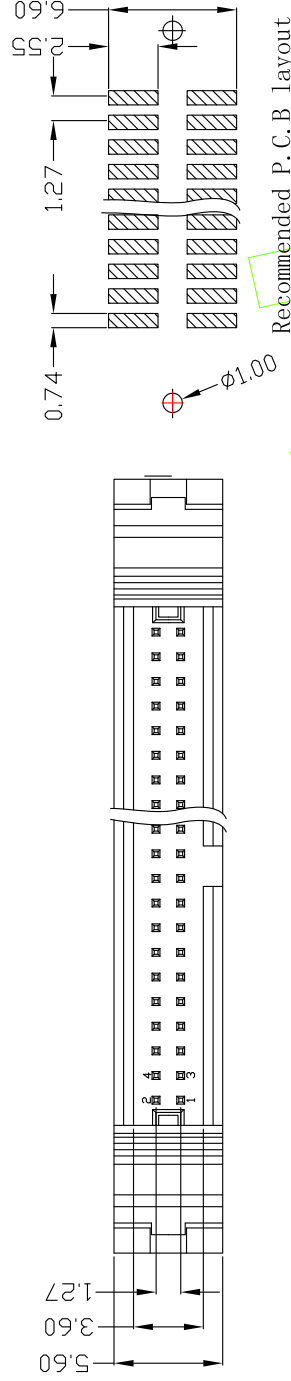

LARCON
连润电子有限公司
Larcon Electronics Co., Ltd.

A1	20/06/09	Improve numbering instructions (完善编号标注说明)	Δ_{11}	Fang	X.XX ±0.25	CHECK	SIZE	A4	DESIGN	PART NO.	1E02M-1XXXXXXXV2
A0	12/05/18	NEW	—	—	X.XXX ±0.15	Angle ±3°	SHEET	1/1	CHECK	TITLE:	1. 27牛角 SMT帶柱
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.	